



Catalogue of Equipment for OHTL

Katalog ovjesne i spojne opreme za nadzemne vodove


Introduction

Dalekovod OSO as member of **DALEKOVOD Group** develops and manufactures high quality Hardware and Fittings for OHTL up to 750 kV. With over 75 years of experience in manufacturing, Dalekovod OSO is active in more than 80 countries worldwide and is recognized as a global energy partner and solution provider.

Thanks to our skilled team of engineers and our own tooling department, we offer a high level of flexibility to our customers manufacturing both standardized and Tailor-Made fittings according to specific customer needs. All manufacturing and testing facilities are situated in Croatia, European Union.

Product portfolio covers overhead transmission line fittings and hardware, substation accessories, catenary systems. Within scope of services, we provide testing in accredited laboratory facility as well as damping studies within R&D department. All of our products are manufactured according to latest industry standards and we are proud owners of certificate Croatian Quality.

Certifications: ISO 9001; ISO 14001; ISO 45001; EN ISO 50001; ACHILLES UNCE; Croatian Quality

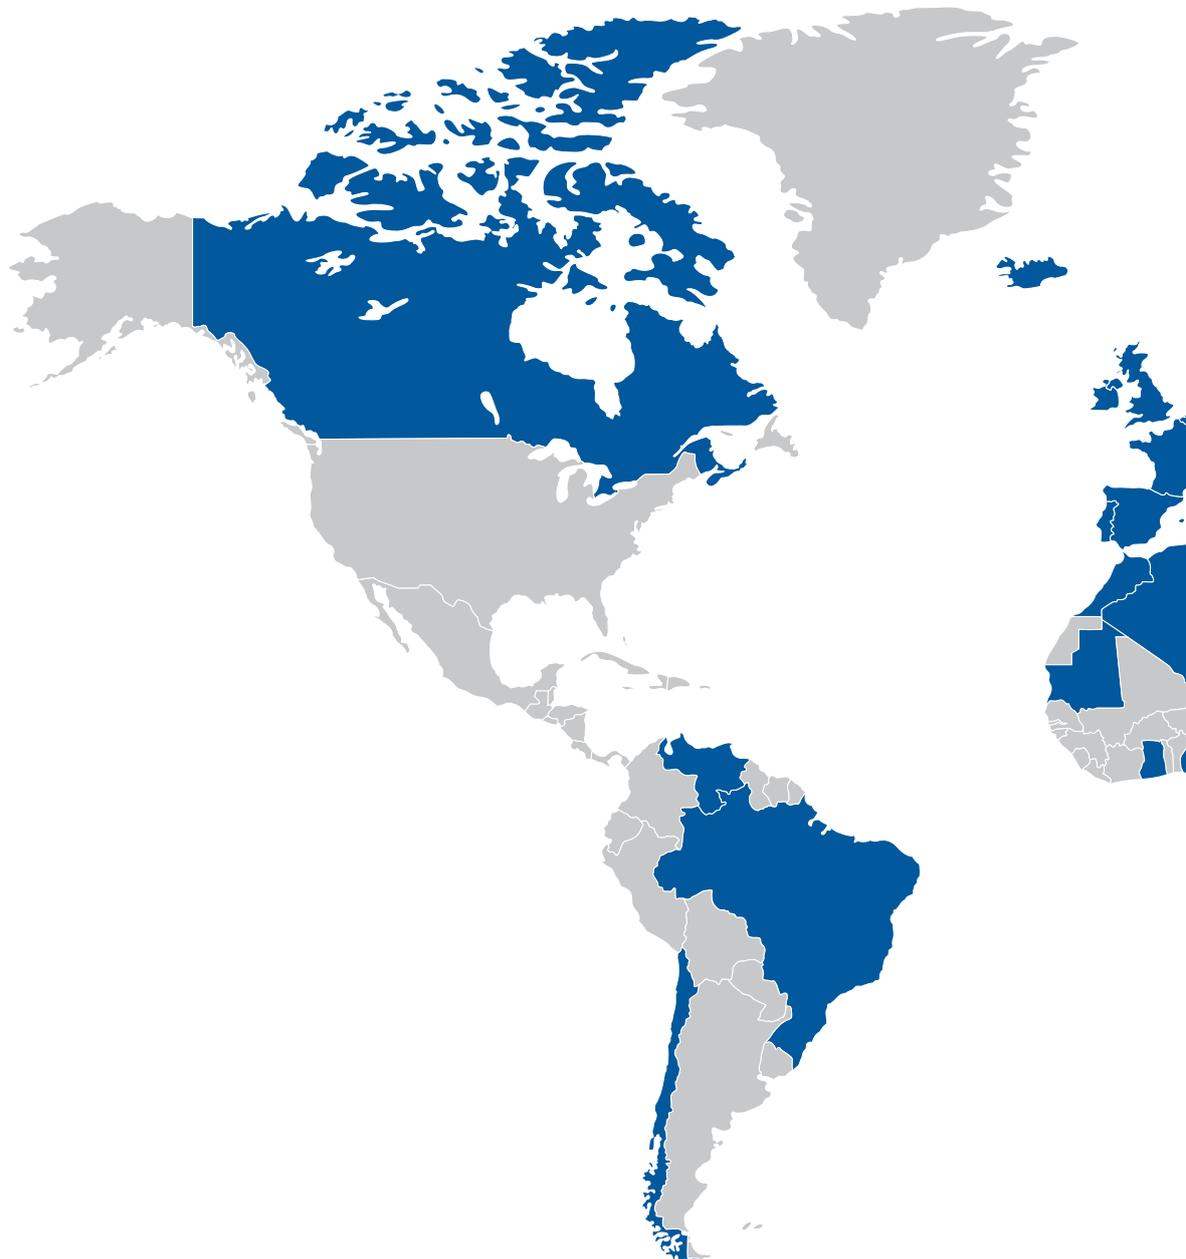


Uvod

Dalekovod OSO, kao član **Dalekovod Grupe**, razvija i proizvodi visokokvalitetnu opremu i pribor za nadzemne dalekovode (OHTL) do 750 kV. S više od 75 godina iskustva u proizvodnji, Dalekovod OSO je sa svojim proizvodima prisutan u više od 80 zemalja širom svijeta i prepoznat je kao globalni energetska partner i pružatelj kvalitetnih rješenja.

Zahvaljujući našem stručnom timu inženjera i vlastitom odjelu za izradu alata, nudimo visok stupanj fleksibilnosti našim kupcima, proizvodeći standardizirane i prilagođene spojeve prema specifičnim zahtjevima kupaca. Sve proizvodne i ispitne jedinice nalaze se u Hrvatskoj, u Europskoj uniji.

Naš asortiman proizvoda obuhvaća pribor i opremu za nadzemne prijenosne vodove, dodatke za transformatorske stanice te kontaktne mreže. U sklopu naših usluga nudimo ispitivanja u akreditiranom laboratoriju, kao i studije prigušenja u našem odjelu za istraživanje i razvoj. Svi naši proizvodi izrađeni su prema najnovijim industrijskim standardima, a ponosni smo nositelji certifikata Hrvatska kvaliteta.

Certifikati: ISO 9001; ISO 14001; ISO 45001; EN ISO 50001; ACHILLES UNCE; Hrvatska kvaliteta.

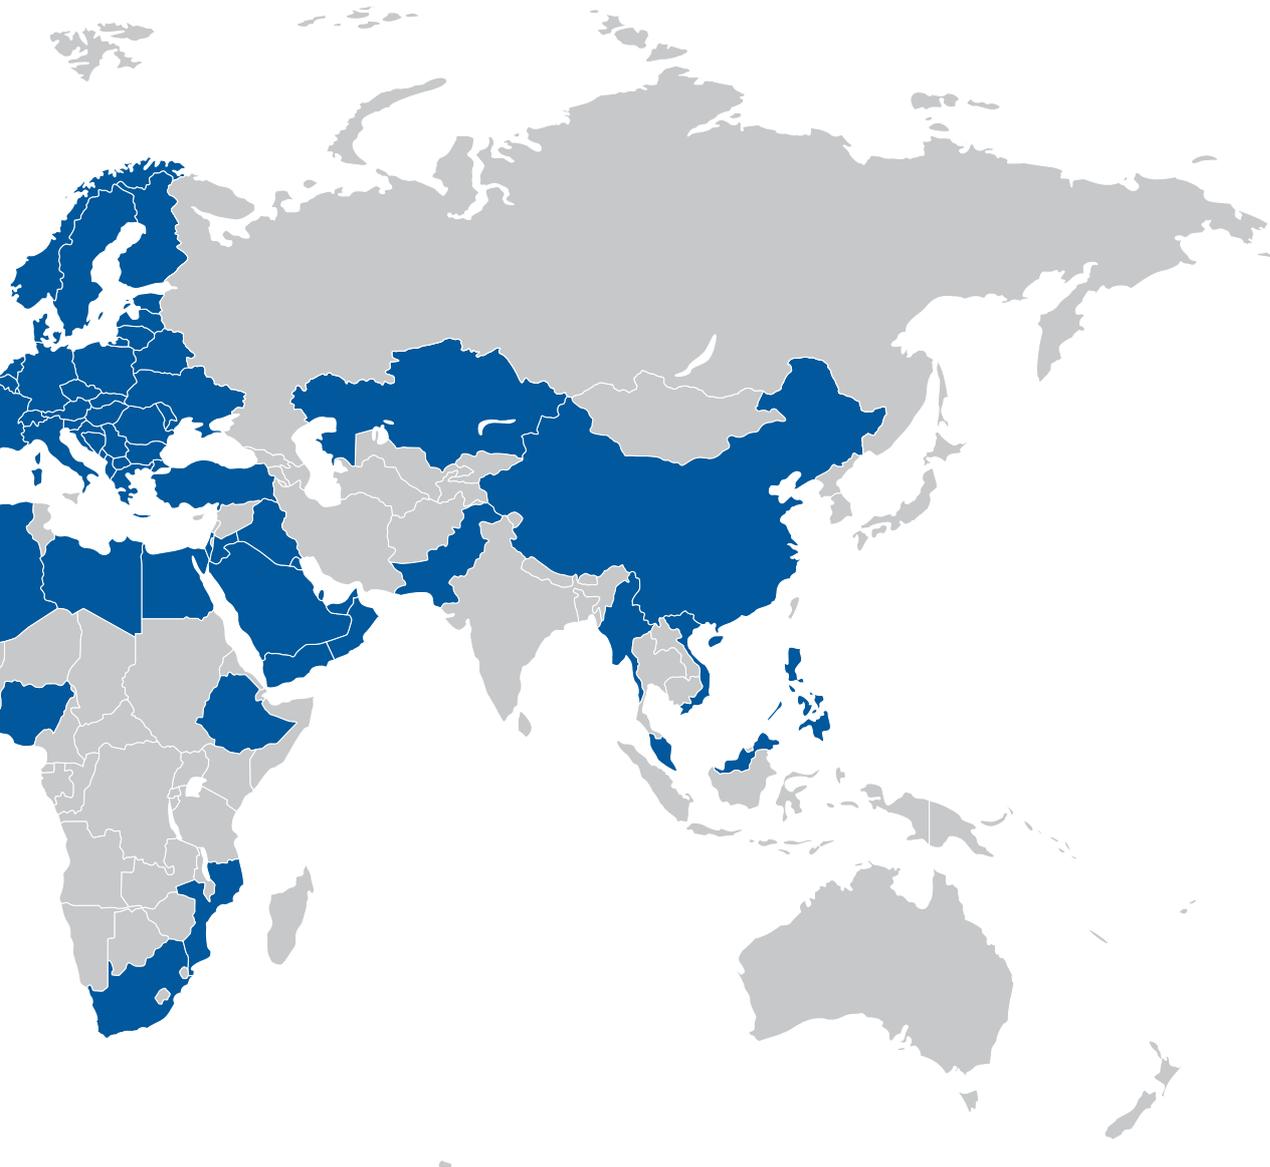

**String hardware,
yokes, turnbuckles,
extension links,
adjustable
extension**

**Ovjesna oprema,
odstojnici, zatezači,
produžnici i
podešavajući
produžnici**



Stable operation of high voltage transmission lines entirely depends on suspension and jointing equipment that mechanically connects all components of insulation strings, primarily insulators, conductors and towers.

Our 75 years long experience in development, design and production of suspension and jointing equipment, testing results and experience from building and service of transmission lines are a guarantee of the quality, reliability and functionality of this equipment.

String hardware is used to connect insulators with the towers and conductors under mechanical load.

Ball and socket connections and Clevis-eye connections are standardized according to the following International standards:

- IEC 60120, Dimensions of ball and socket couplings of string insulator units
- ANSI C 29.2 (52-3 for Ball 16 / 52-5 for Ball 18 / 52-8 for Ball 22)
- IEC 60372, Locking devices for ball and socket couplings of string insulator units
- IEC 60471, Eyes and clevises: Connecting dimensions

In order to withstand the static as well as dynamic loads, heat treated steels will be used for the string hardware as follows:

- Steels for quenching and tempering according to EN 10083
- Structural steels for hinges, links, yokes etc. according to EN 10025
- Malleable cast according to EN 1562 and spheroidal graphite cast (ductile iron) acc. to EN 1563 for some fittings
- For special cases where high dynamic loads may occur at low temperatures, fittings made of low-temperature steels are used
- Split pins for bolts are made of stainless steel or optionally made of copper and tin-plated
- Security split pins for ball and socket couplings according to IEC 60372 are also made of stainless steel
- All socket fittings are equipped with security split pins
- All fittings made of steel will be hot dip galvanized according to EN ISO 1461 or ASTM A153. For projects with aggressive atmosphere, the minimum zinc thickness of fittings can be increased from 85 microns to 110 or 130 microns.

Stabilan rad visokonaponskih dalekovoda u potpunosti ovisi o ovjesnoj i spojnoj opremi koja mehanički povezuje sve komponente izolatorskih lanaca, prvenstveno izolatore, vodiče i stupove.

Naše 75 godina dugo iskustvo u razvoju, projektiranju i proizvodnji ovjesne i spojne opreme, rezultati ispitivanja te iskustvo u izgradnji i servisiranju dalekovoda jamstvo su kvalitete, pouzdanosti i funkcionalnosti ove opreme.


Ovjesna oprema se koriste za spajanje izolatora sa stupovima i vodičima pod mehaničkim opterećenjem.

Spojevi batić-zdjelica te vilica-očka standardizirani su prema sljedećim međunarodnim standardima:

- IEC 60120, Spojevi batić-zdjelica za izolatore u izolatorskom lancu - Dimenzije
- ANSI C 29.2 (52-3 za batić 16 / 52-5 za batić 18 / 52-8 za batić 22)
- IEC 60372, Uređaji za osiguranje spoja batić-zdjelica za izolatore u izolatorskom lancu
- IEC 60471, Spojevi vilica i očki za izolatore u izolatorskom lancu - Dimenzije

Kako bi izdržali statička i dinamička opterećenja, toplinski obrađeni čelici koristit će se za ovjesnu opremu kako slijedi:

- Čelici za poboljšavanje prema EN 10083
- Konstrukcijski čelici za zastavice, produžnike, odstojnike itd. prema EN 10025
- Temporni lijevovi prema EN 1562 i nodularni lijevovi prema EN 1563 za neke elemente
- Za posebne slučajeve gdje se mogu pojaviti visoka dinamička opterećenja pri niskim temperaturama, koriste se elementi izrađeni od niskotemperaturnih čelika
- Rascjepke za vijke izrađene su od nehrđajućeg čelika ili po želji od bakra i pokositrene
- Sigurnosne rascjepke za spojeve batić-zdjelica prema IEC 60372 također su izrađene od nehrđajućeg čelika
- Sve zdjelice su opremljene sigurnosnim rascjepkama
- Svi elementi izrađeni od čelika bit će vruće pocinčani u skladu s EN ISO 1461 ili ASTM A153. Za projekte s agresivnom atmosferom, minimalna debljina cinka može se povećati s 85 mikrona na 110 ili 130 mikrona.

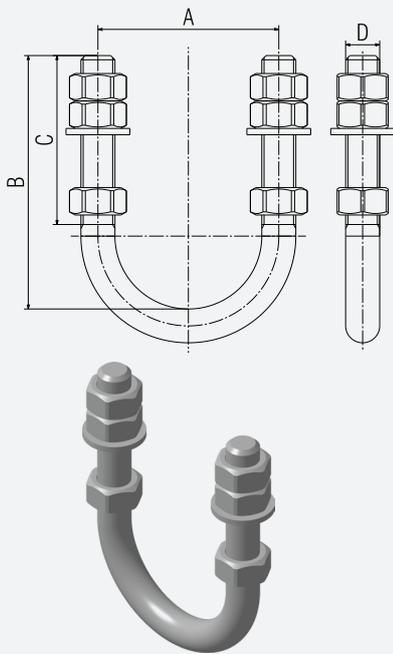


U-Bolts U-vijci

Catalogue number Kataloški broj	Dimension Dimenzije [mm]				Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D		
35.12.52	50	100	65	12	40	0,25
35.14.70	70	96	60	14	80	0,47
35.16.72	80	129	80	16	120	0,77
35.18.72	80	137	85	18	160	1,05
35.20.85	100	235	162	20	180	1,88
35.22.70.20	70	153	81	22	240	1,65

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

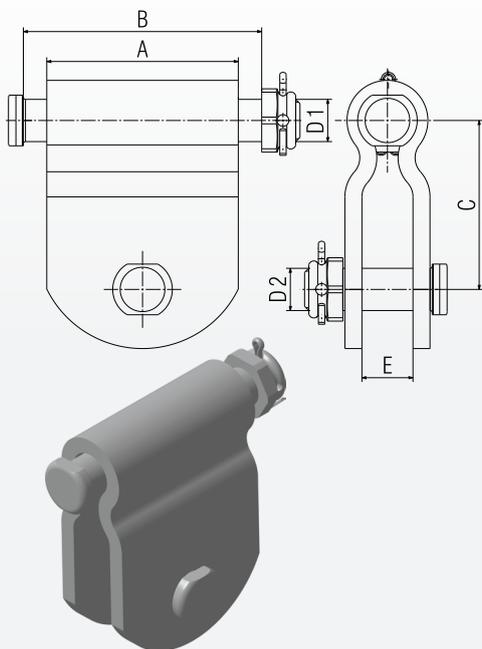


Suspension hinges Zastavice

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	D1	D2		
69.60.65.20	60	105	65	20	20	20	120	1,22
69.70.70D	70	105	70	20	20	16	135	1,53
69.90.75.5	90	120	75	22	24	20	160	2,35
69.110.90D	110	154	75	24	24	20	160	3,12
69.120.100	120	180	100	24	30	24	320	4,60
69.130.80	130	158	80	24	32	25	400	5,20

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

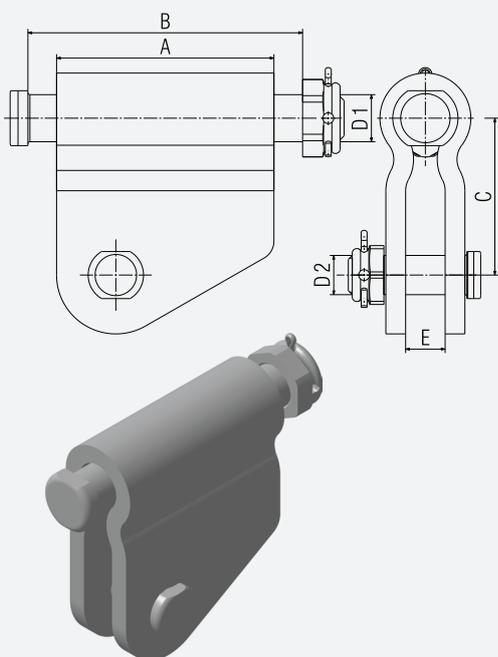


Strain hinges Zastavice

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	D1	D2		
69.75.90.40	75	105	65	24	20	20	160	1,65
69.90.60.20	90	140	80	24	20	16	120	1,70
69.90.80.10	90	125	80	20	22	20	210	2,25
69.100.80	100	130	80	24	25	22	300	3,10
69.120.80	120	150	80	20	28	20	320	3,10
69.165.70	165	200	90	24	30	27	420	7,50

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

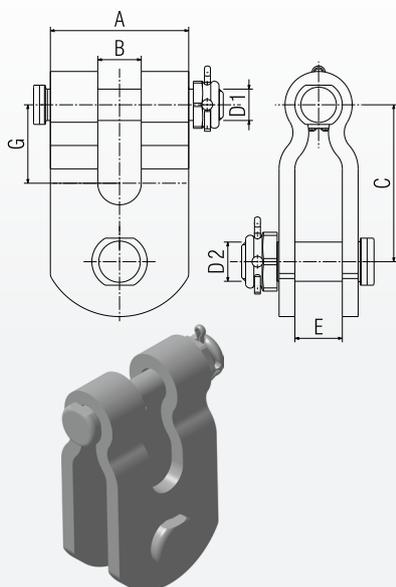


Cross hinges - Universal joints Zastavice

Catalogue number Kataloški broj	Dimension Dimenzije [mm]							Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	G	D1	D2		
69.60.80A	60	24	80	24	45	20	16	120	1,20
69.60.80.6	60	22	80	24	40	20	20	160	1,40
69.80.100.7	80	24	100	24	40	22	22	210	2,00
69.90.80.70	90	24	80	24	50	22	22	320	2,40
69.100.90.20	100	22	110	24	65	28	28	420	3,60
69.120.110	120	26	110	24	60	32	32	600	5,90

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

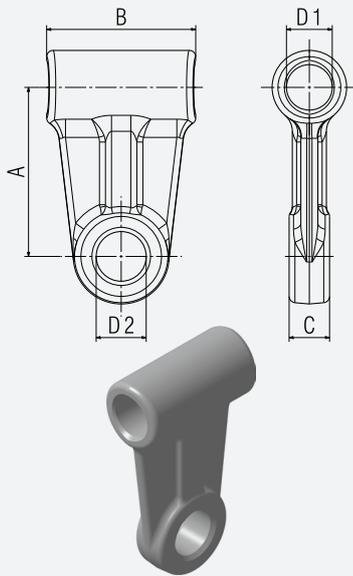


Suspension hinges Zastavice

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D1	D2		
68.55.21.21	75	55	19	21,5	17,5	120	0,51
68.55.21.41	75	55	16	21,5	17,5	120	0,49
68.70.21.21	80	70	19	17,5	17,5	120	0,78
68.70.21.61	80	70	19	21,5	23,5	210	0,69
68.70.21.71	80	70	19	23,5	23,5	210	0,64

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

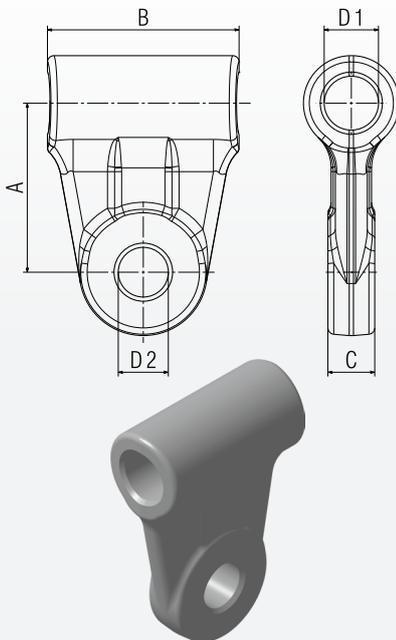


Suspension hinges Zastavice

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D1	D2		
68.55.11	75	55	22	21,5	21,5	120	0,90
68.70.11	80	70	22	21,5	21,5	160	1,40
68.90.11	80	90	22	25,5	23,5	320	1,50
68.110.61	70	110	22	25,5	28,5	480	1,75
68.120.21	80	120	22	23,5	21,5	300	2,66
68.100.11A	140	100	22	25,5	23,5	240	2,72

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

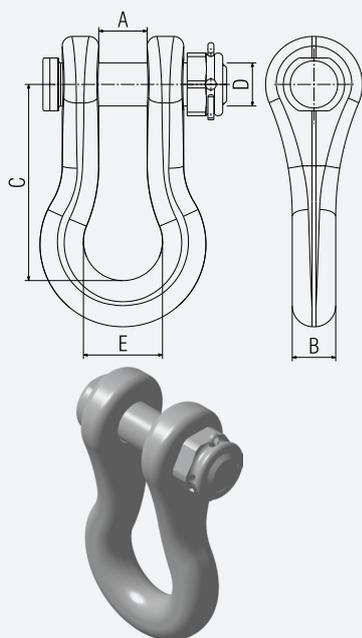


Straight shackles Ravni škopci

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>					Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	B	C	D	E		
27.08.10	24	16	65	16	35	120	0,50
27.10.10	24	18	75	20	40	210	0,85
27.11.10	24	18	100	20	40	180	0,98
27.15.10	24	20	100	22	40	250	1,45
27.20.20	24	22	100	22	40	320	1,50
27.21.20A	30	28	120	27	45	450	3,40

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

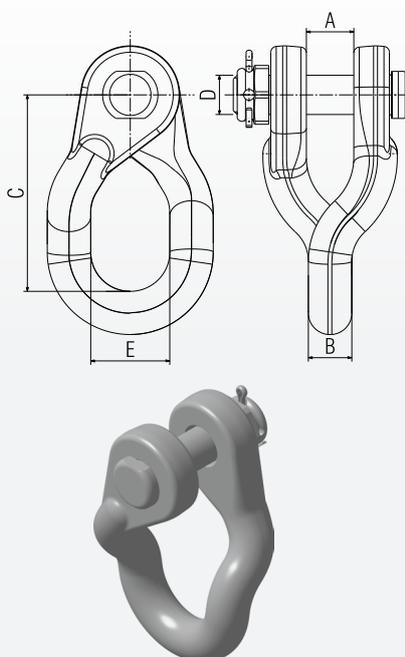


Twisted shackles Zakrenuti škopci

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>					Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	B	C	D	E		
27.30.10	24	16	90	16	35	120	0,65
27.32.10	24	18	90	20	40	160	0,95
27.35.10	24	22	100	22	40	250	1,45

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

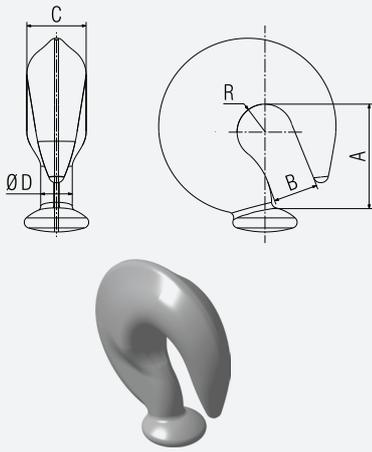


Ball hooks Kuke s batićem

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D	R			
20.30.10	52	22	30	17	14	IEC 120/16	120	0,75
20.30.40	52	22	30	16	14	ANSI 52-3	133	0,75

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

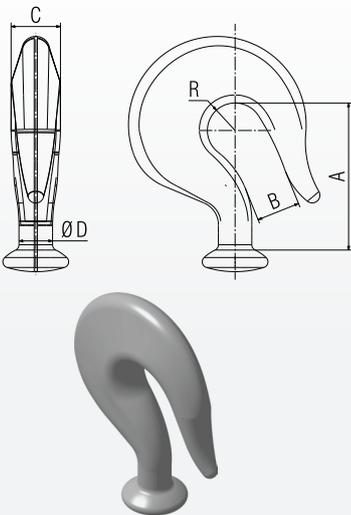


Ball hooks Kuke s batićem

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	ØD	R			
20.08.10	74	22	25	17	14	IEC 120/16	120	0,80
20.09.10	74	22	25	18	14	Ansi 52-5	136	0,83

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.




Double balls Dvostruki batići

Catalogue number Kataloški broj	Dimension Dimenzije [mm]		Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	ØD			
23.81.20	22	12	IEC 120/11	40	0,10
23.81.10	38	17	IEC 120/16	120	0,20
23.82.10	32	20	IEC 120/20	160	0,25

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.





Double balls Dvostruki batići

Catalogue number Kataloški broj	Dimension Dimenzije [mm]		Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	ØD			
23.81.20	60	17	IEC 120/16	120	0,26

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.






Ball eyes Očke s batićem

Catalogue number Kataloški broj	Dimension Dimenzije [mm]				Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	ØD			
21.12.30	48	22	11	12	IEC 120/11	40	0,15
21.12.20	67	25	16	17	IEC 120/16	120	0,32
21.12.10	67	35	14	17	IEC 120/16	100	0,58

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.




Long ball eyes Karike s batićem

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	Ød			
21.25.10	100	30	16	60	17	IEC 120/16	120	0,45
21.58.10	102	30	20	60	21	IEC 120/20	160	0,74
21.25.10.80	99	30	16	60	18	Ansi 52-5	120	0,46
21.58.80	102	30	20	60	22	Ansi 52-8/11	180	0,75

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

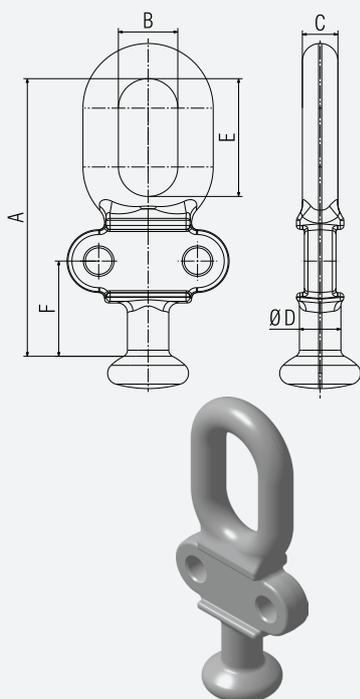


Ball eyes for arcing fittings Karike s batićem za zaštitne rogove

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	F	ØD			
21.37.50	134	30	16	60	44	17	IEC 120/16	120	0,70
21.77.10	142	30	18	60	49	21	IEC 120/20	160	0,98
21.37.50.2	146	30	16	60	56	18	ANSI 52-5	133	0,75
21.41.50	142	30	18	60	48	22	ANSI 52-8/11	180	1,00

Material: drop forged steel, hot dip galvanized.
The hole distance is 50 mm for 2 bolts M12.
Other hole distances are available upon request.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Razmak provrta za dva vijka M12 iznosi 50 mm.
Ostali razmaci provrta dostupni su na zahtjev.
Ostale dimenzije dostupne su na zahtjev.

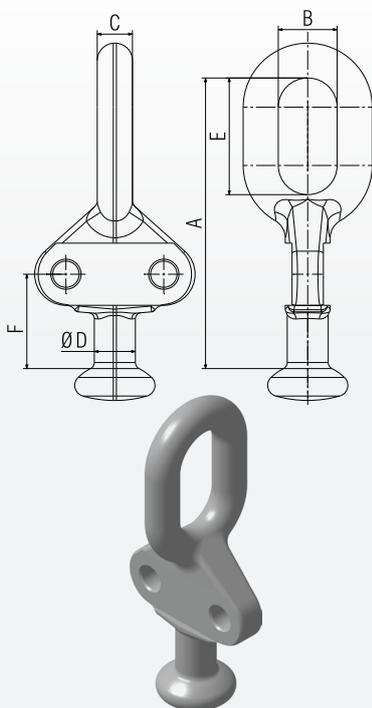


Ball eyes 90° for arcing fittings Karike s batićem 90° za zaštitne rogove

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	F	Ød			
21.22.50	136	30	16	55	44	17	IEC 120/16	120	0,77
21.95.50	150	30	18	60	49	21	IEC 120/20	160	1,40

Material: drop forged steel, hot dip galvanized.
The hole distance is 50 mm for 2 bolts M12.
Other hole distances are available upon request.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Razmak provrta za dva vijka M12 iznosi 50 mm.
Ostali razmaci provrta dostupni su na zahtjev.
Ostale dimenzije dostupne su na zahtjev.

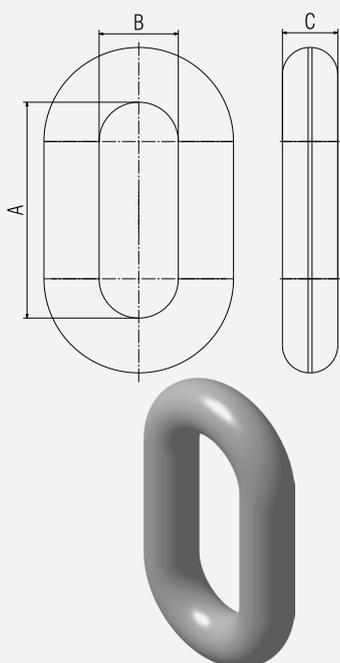


Eyes Karike

Catalogue number Kataloški broj	Dimension Dimenzije [mm]			Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C		
21.23.10	70	30	16	140	0,36
21.35.10	80	30	18	210	0,51
21.49.10	80	30	22	280	0,80
21.68.10	110	40	28	480	1,76

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

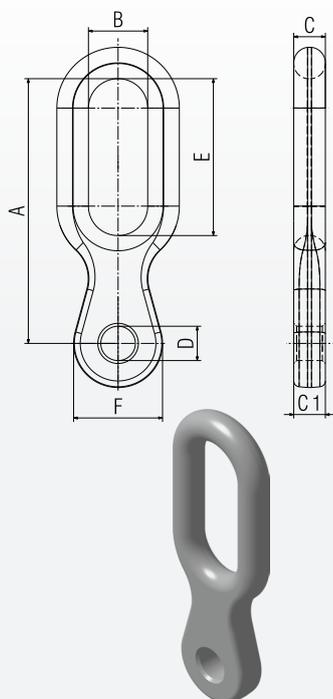


Eye tongues Karike s očkom

Catalogue number Kataloški broj	Dimension Dimenzije [mm]							Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	C1	E	F	D		
21.66.10	135	30	16	16	80	45	17,5	120	0,60
21.66.50	135	30	16	16	80	45	21,5	135	0,59

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

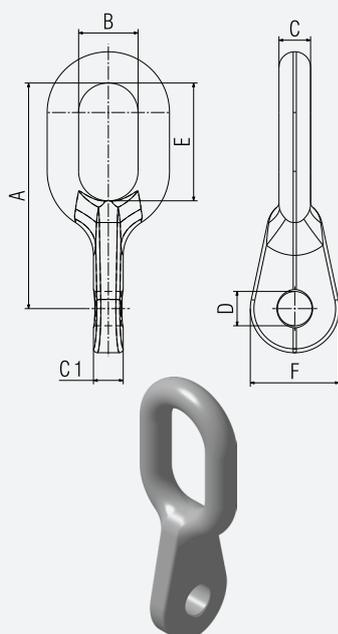


Eye tongues 90° Karike s očkom 90°

Catalogue number Kataloški broj	Dimension Dimenzije [mm]							Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	C1	E	F	D		
21.33.10	115	30	16	16	60	45	17,5	120	0,55
21.33.30	115	30	16	19	60	45	21,5	120	0,60
21.33.40	115	30	16	22	60	45	17,5	120	0,65

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

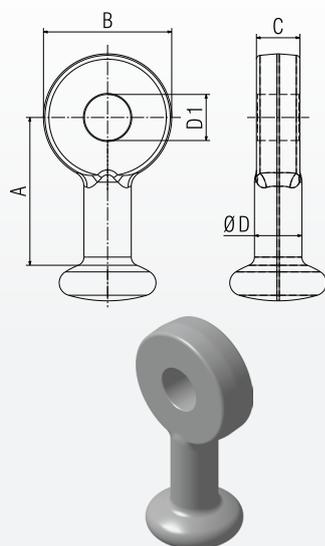


Ball tongues Očke s batićem

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D1	Ød			
23.01.10	39	40	14	17,5	17	IEC 120/16	100	0,20
23.01.40	50	50	19	21,5	17	IEC 120/16	120	0,35
23.01.50	65	60	19	21,5	21	IEC 120/20	160	0,50
23.10.10D	75	65	22	23,5	25	IEC 120/24	300	0,90

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

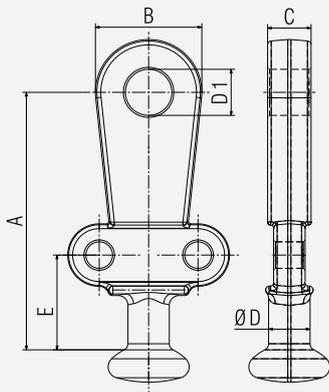


Ball tongues for arcing fittings Očke s batićem za zaštitne robove

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	D1	ØD			
23.56.10	114	48	22	44	21,5	17	IEC 120/16	120	0,85
23.56.20	114	48	22	44	17,5	17	IEC 120/16	120	0,87
23.59.10	132	54	22	49	23,5	21	IEC 120/20	160	1,20
23.59.20	132	54	22	49	21,5	21	IEC 120/20	160	1,22
23.62.10	132	60	22	51	23,5	25	IEC 120/24	280	1,40

Material: drop forged steel, hot dip galvanized.
The hole distance is 50 mm for 2 bolts M12.
Other hole distances are available upon request.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Razmak provrta za dva vijka M12 iznosi 50 mm.
Ostali razmaci provrta dostupni su na zahtjev.
Ostale dimenzije dostupne su na zahtjev.




Ball tongues 90° for arcing fittings Očke s batićem 90° za zaštitne robove

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	D1	ØD			
23.57.10	115	50	22	45	21,5	17	IEC 120/16	120	0,85
23.57.20	115	50	22	45	17,5	17	IEC 120/16	120	0,87
23.58.30	128	60	22	56	21,5	21	IEC 120/20	160	1,22
23.58.30F	128	60	22	56	23,5	21	IEC 120/20	160	1,20
23.58.30D	128	60	22	56	21,5	21	IEC 120/24	210	1,22

Material: drop forged steel, hot dip galvanized.
The hole distance is 50 mm for 2 bolts M12.
Other hole distances are available upon request.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Razmak provrta za dva vijka M12 iznosi 50 mm.
Ostali razmaci provrta dostupni su na zahtjev.
Ostale dimenzije dostupne su na zahtjev.

Ball clevises

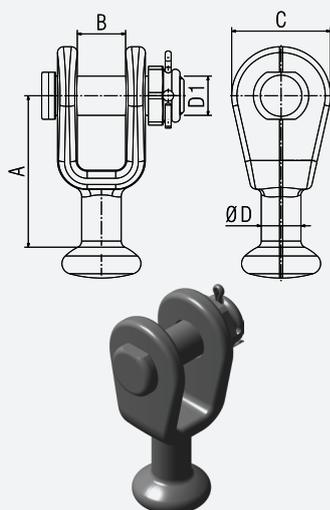


Vilice s batićem

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D1	ØD			
23.31.30	56	18	36	16	11	IEC 120/11	45	0,35
23.24.90	74	24	50	20	22	ANSI 52- 8/11	180	1,00
23.32.20	73	20	50	20	21	IEC 120/20	160	0,84
23.48.10	76	24	50	20	21	IEC 120/20	160	0,95
23.28.10	67	20	40	16	17	IEC 120/16	120	0,52

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

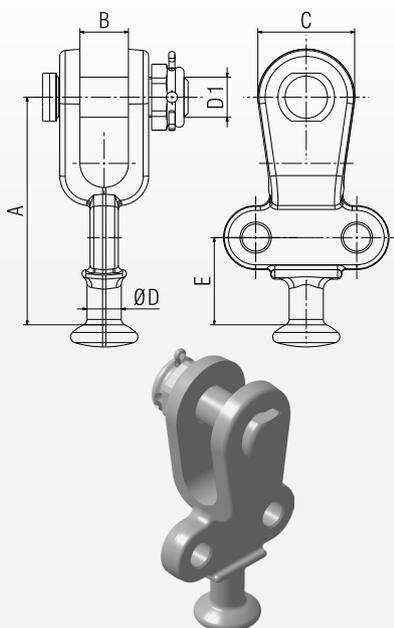


Ball clevises for arcing fittings Vilice s batićem za zaštitne robove

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]	
	A	B	C	E	D1				ØD
22.56.10	114	24	48	44	20	17	IEC 120/16	120	1,10
22.56.20	114	24	48	44	16	17	IEC 120/16	120	1,00
22.59.10	131	24	52	48	22	21	IEC 120/20	160	1,65
22.59.20	131	24	52	48	20	21	IEC 120/20	160	1,55
22.59.40D	132	20	54	48	20	21	IEC 120/20	210	1,80
22.59.90	132	24	52	49	20	22	ANSI 52-8	180	1,62

Material: drop forged steel, hot dip galvanized.
The hole distance is 50 mm for 2 bolts M12.
Other hole distances are available upon request.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Razmak provrta za dva vijka M12 iznosi 50 mm.
Ostali razmaci provrta dostupni su na zahtjev.
Ostale dimenzije dostupne su na zahtjev.

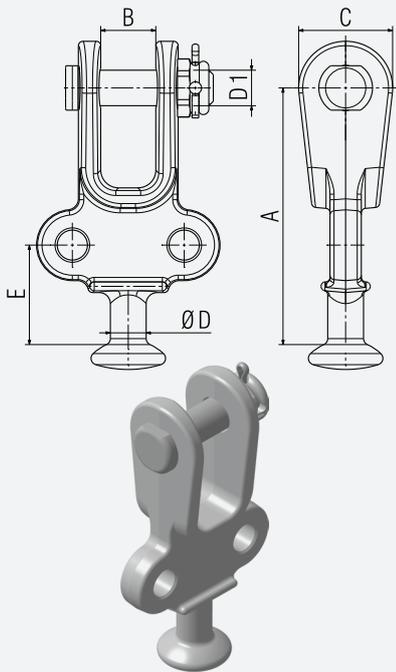


Ball clevises 90° for arcing fittings Vilice s batićem 90° za zaštitne robove

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	D1	ØD			
22.57.10	114	24	42	44	20	17	IEC 120/16	120	0,80
22.57.80	136	24	50	53	16	18	ANSI 52-5	135	1,19
22.58.10	132	24	50	49	22	21	IEC 120/20	160	1,38
22.58.80	132	24	50	49	20	22	ANSI 52-8	180	1,40
22.134.90E	145	26	56	63	22	25	IEC 120/24	300	2,10

Material: drop forged steel, hot dip galvanized.
The hole distance is 50 mm for 2 bolts M12.
Other hole distances are available upon request.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Razmak provrta za dva vijka M12 iznosi 50 mm.
Ostali razmaci provrta dostupni su na zahtjev.
Ostale dimenzije dostupne su na zahtjev.

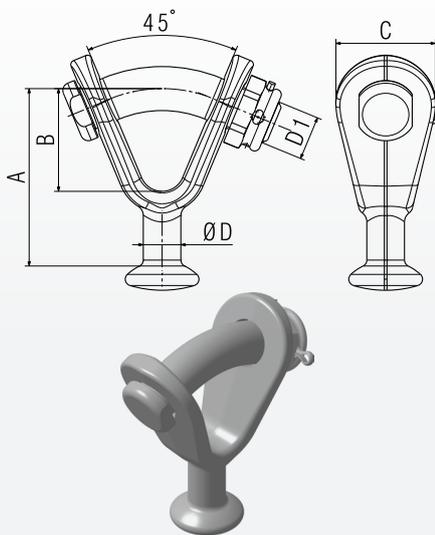


Ball clevises "Y" Vilice s batićem "Y"

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D1	ØD			
22.04.10	80	47	45	16	17	IEC 120/16	120	0,72
22.04.20D	80	47	45	20	17	IEC 120/16	120	0,73
22.04.40	80	47	45	20	17	ANSI 52-3	120	0,85
22.124.10D	101	53	50	20	21	IEC 120/20	160	1,17
22.124.80	103	55	50	22	22	ANSI 52-8	160	1,25
22.135.10X	151	52	55	22	25	IEC 120/24	320	2,10

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

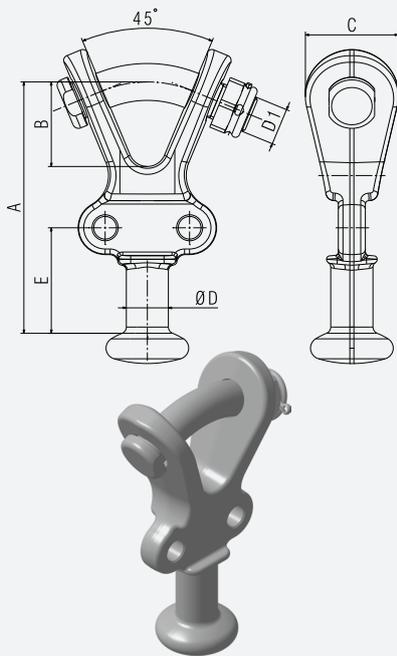


Ball clevises "V" 90° for arcing fittings Vilice s batićem "V" 90° za zaštitne robove

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	D1	ØD			
22.127.10	114	45	42	44	16	17	IEC 120/16	120	0,95
22.123.10	132	53	50	50	22	21	IEC 120/20	160	1,60
22.123.20	132	53	50	50	20	21	IEC 120/20	160	1,50
22.134.90	150	51	55	63	22	25	IEC 120/24	300	2,00
22.134.90X	150	51	55	63	22	25	IEC 120/24	320	2,00

Material: drop forged steel, hot dip galvanized.
The hole distance is 50 mm for 2 bolts M12.
Other hole distances are available upon request.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Razmak provrta za dva vijka M12 iznosi 50 mm.
Ostali razmaci provrta dostupni su na zahtjev.
Ostale dimenzije dostupne su na zahtjev.

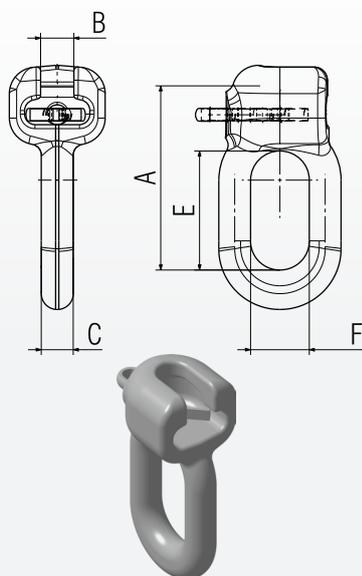


Socket eyes Zdjelice s karikom

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	F			
24.75.10	71	12,5	12	45	22	IEC 120/11	40	0,30
24.71.10	76	19,2	14	40	22	IEC 120/16	100	0,75

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

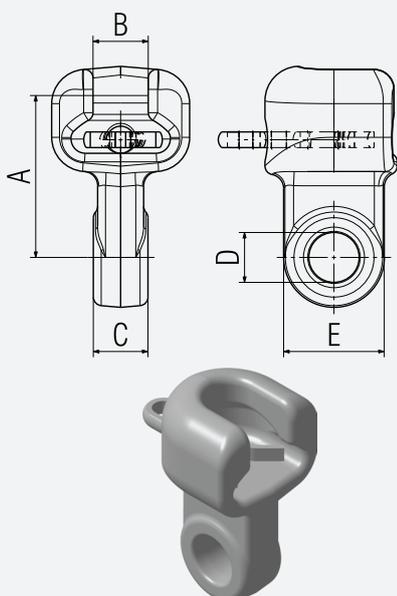


Socket tongues Zdjelice s očkom

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	D			
24.03.20	55	19,2	19	35	17,5	IEC 120/16	80	0,49
24.08.30	63	19,2	19	42	21,5	IEC 120/16	120	0,81
24.08.50.2	64	19,2	16	42	17,5	ANSI 52-3 ANSI 52-5	133	0,81
24.17.10	79	23	22	50	21,5	IEC 120/20	160	1,17
24.17.80	79	23	19	60	20,5	IEC 120/20	210	1,37

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

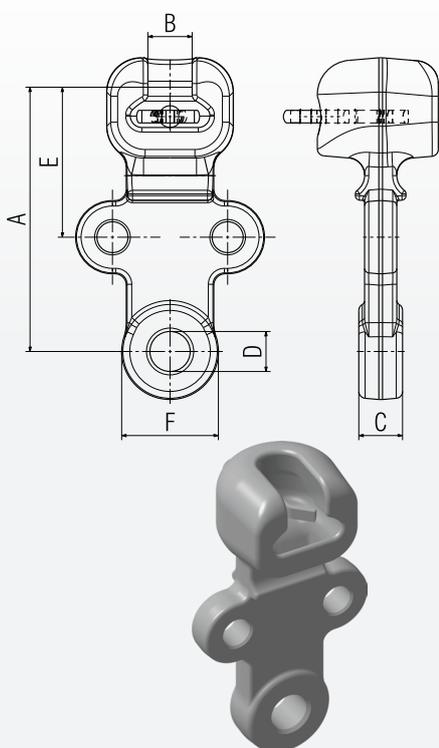


Socket tongues for arcing fittings Zdjelice s očkom za zaštitne robove

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	F	D			
24.33.10A	116	19,2	19	66	42	17,5	IEC 120/16	120	1,05
24.33.20H	116	19,2	19	66	42	17,5	IEC 120/16	120	1,18
24.34.10	118	23	22	68	50	21,5	IEC 120/20	210	1,40
24.34.70	118	24,7	22	66	50	21,5	ANSI 52-8 ANSI 52-11	210	1,46
24.34.50	185	27,5	22	135	60	23,5	IEC 120/24	280	2,20
24.34.50.90	185	27,5	22	135	60	26,5	IEC 120/24	320	2,20

Material: drop forged steel, hot dip galvanized.
The hole distance is 50 mm for 2 bolts M12.
Other hole distances are available upon request.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Razmak provrta za dva vijka M12 iznosi 50 mm.
Ostali razmaci provrta dostupni su na zahtjev.
Ostale dimenzije dostupne su na zahtjev.

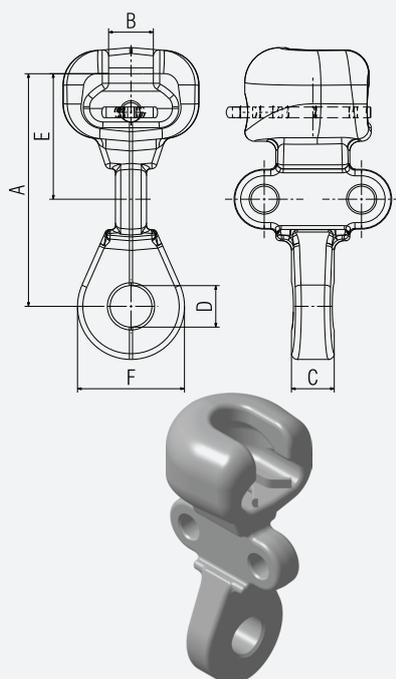


Socket tongues 90° for arcing fittings Zdjelice s očkom 90° za zaštitne rogove

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	F	D			
24.96.10	116	19,2	22	66	45	17,5	IEC 120/16	120	1,05
24.96.30.20	110	19,2	22	60	45	17,5	ANSI 52-3 ANSI 52-5	100	1,05
24.95.10	121	23	22	66	55	21,5	IEC 120/20	160	1,62
24.95.40	121	23	22	66	55	30	IEC 120/20	210	1,30

Material: drop forged steel, hot dip galvanized.
The hole distance is 50 mm for 2 bolts M12.
Other hole distances are available upon request.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Razmak provrta za dva vijka M12 iznosi 50 mm.
Ostali razmaci provrta dostupni su na zahtjev.
Ostale dimenzije dostupne su na zahtjev.

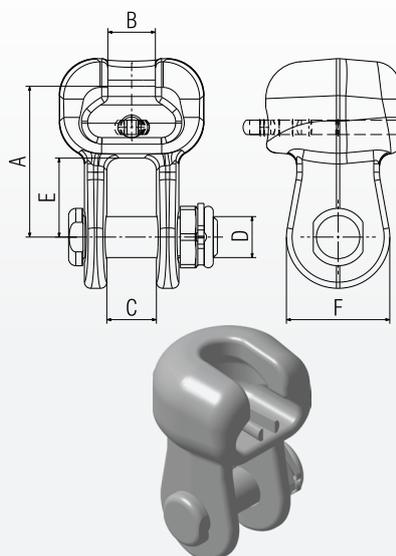


Socket clevises Zdjelice s vilicom

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	F	D			
24.41.30	69	19,2	20	36	45	20	IEC 120/16	120	1,15
24.60.40H	70	19,2	20	36	45	20	ANSI 52-3 ANSI 52-5	120	1,15
24.60.10	71	19,2	24	38	45	16	IEC 120/16	120	1,05
24.80.10	73	23	24	38	50	20	IEC 120/20	210	1,41
24.80.80.20	73	24,7	24	38	50	22	ANSI 52-8 ANSI 52-11	180	1,50
24.79.85.20	108	23	24	45	50	20	IEC 120/20	210	1,89

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

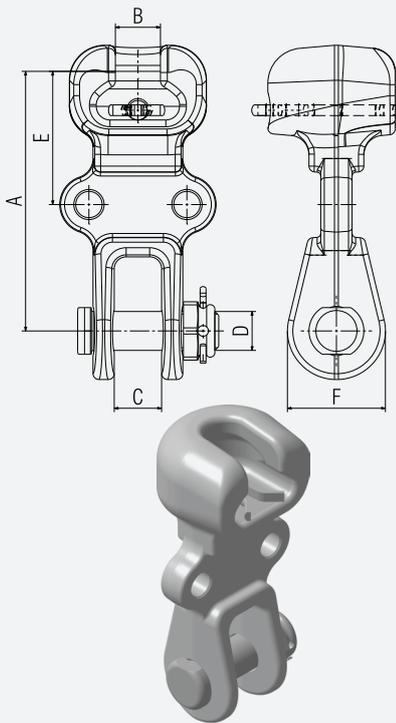


Socket clevises for arcing fittings Zdjelice s vilicom za zaštitne robove

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	F	D			
24.87.80.50	128	19,2	24	63	45	20	IEC 120/16	120	1,70
24.87.80.80	129	19,2	24	64	45	16	ANSI 52-3 ANSI 52-5	120	1,40
24.87.80	133	23	24	68	50	20	IEC 120/20	160	2,01
24.87.90	132	24,7	24	67	50	20	ANSI 52-8 ANSI 52-11	180	2,06
24.109.10E	151	27,5	26	78	56	22	IEC 120/24	300	3,21

Material: drop forged steel, hot dip galvanized.
The hole distance is 50 mm for 2 bolts M12.
Other hole distances are available upon request.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Razmak provrta za dva vijka M12 iznosi 50 mm.
Ostali razmaci provrta dostupni su na zahtjev.
Ostale dimenzije dostupne su na zahtjev.

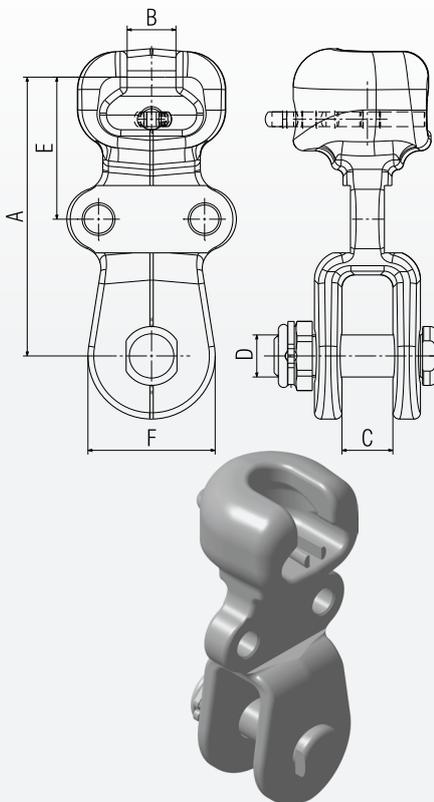


Socket clevises 90° for arcing fittings Zdjelice s vilicom 90° za zaštitne robove

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	F	D			
24.86.30F	133	19,2	24	68	60	20	IEC 120/16	120	2,42
24.86.30G	133	19,2	24	68	60	16	IEC 120/16	120	2,34
24.86.30	133	23	24	68	60	20	IEC 120/20	210	2,20
24.86.40	133	23	24	68	60	22	IEC 120/20	210	2,28
24.86.80.2	132	24,7	24	67	60	20	ANSI 52-8 ANSI 52-11	180	2,22

Material: drop forged steel, hot dip galvanized.
The hole distance is 50 mm for 2 bolts M12.
Other hole distances are available upon request.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Razmak provrta za dva vijka M12 iznosi 50 mm.
Ostali razmaci provrta dostupni su na zahtjev.
Ostale dimenzije dostupne su na zahtjev.

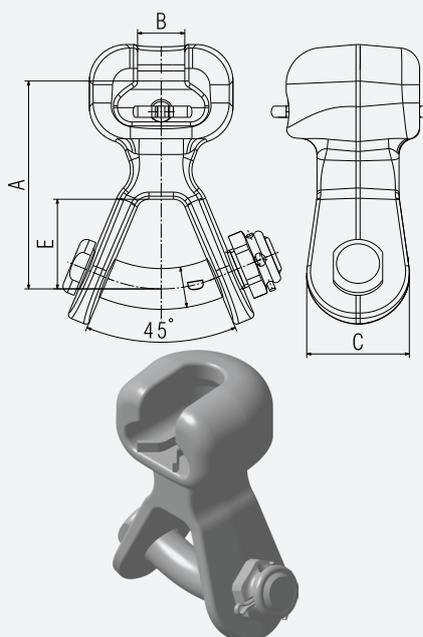


Socket "Y" clevises Zdjelice s "Y" vilicom

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	D			
24.67.10	71	19,2	45	38	20	IEC 120/16	120	1,25
24.67.20	71	19,2	45	38	16	IEC 120/16	120	1,15
24.68.10	108	23	50	44	20	IEC 120/20	210	1,75
24.68.10B	108	24,7	50	45	22	ANSI 52-8 ANSI 52-11	225	1,75
24.107.10	115	27,5	55	52	22	IEC 120/24	300	3,15

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

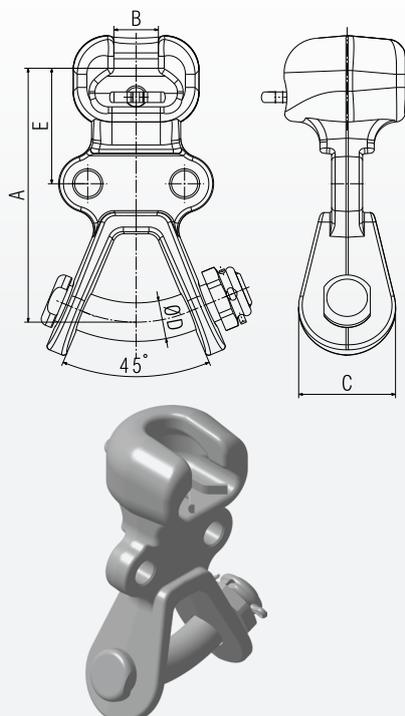


Socket "Y" clevises for arcing fittings Zdjelice s "Y" vilicom za zaštitne robove

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	D			
24.87.50	138	23	50	68	20	IEC 120/20	160	2,00
24.109.10	152	27,5	55	79	22	IEC 120/24	320	3,75

Material: drop forged steel, hot dip galvanized.
The hole distance is 50 mm for 2 bolts M12.
Other hole distances are available upon request.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Razmak provrta za dva vijka M12 iznosi 50 mm.
Ostali razmaci provrta dostupni su na zahtjev.
Ostale dimenzije dostupne su na zahtjev.

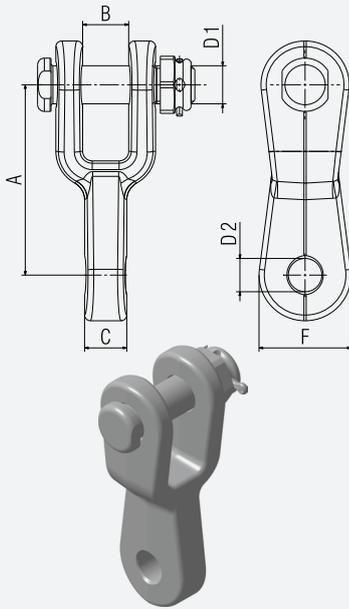


Clevis tongues Vilice s očkom

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	F	D1	D2			
22.07.30	65	24	16	40	16	17,5	60	0,47	1,70
22.09.70	65	24	19	40	20	21,5	120	0,75	1,40
22.09.10.2A	65	24	18	40	16	17,5	120	0,60	2,01
22.42.40.4	100	24	22	48	16	21,5	120	1,19	2,06
22.42.20	100	24	22	48	20	17,5	240	1,26	3,21
22.42.50	100	24	22	48	22	21,5	320	1,35	

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

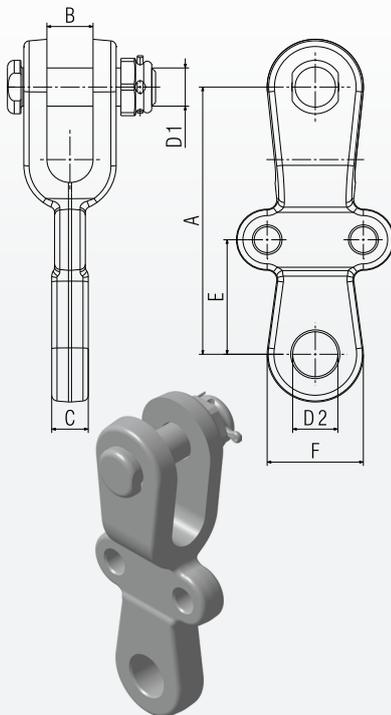


Clevis tongues for arcing fittings Vilice s očkom za zaštitne robove

Catalogue number Kataloški broj	Dimension Dimenzije [mm]							Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	F	D1	D2			
22.71.60	140	20	19	60	50	20	21,5	160	1,70	2,42
22.71.60E	140	18	19	60	50	20	17,5	160	1,80	2,34
22.71.60I	140	24	19	60	50	19	21,5	160	1,60	2,20
22.71.30F	140	20	19	60	50	22	21,5	210	1,75	2,28
22.71.60.6X	140	24	19	60	50	20	23,5	230	1,60	2,22

Material: drop forged steel, hot dip galvanized.
The hole distance is 50 mm for 2 bolts M12.
Other hole distances are available upon request.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Razmak provrta za dva vijka M12 iznosi 50 mm.
Ostali razmaci provrta dostupni su na zahtjev.
Ostale dimenzije dostupne su na zahtjev.

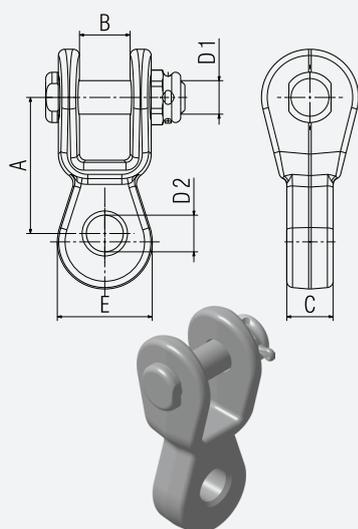


Clevis tongues 90° Vilice s očkom 90°

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	D1	D2			
22.45.80.30	65	20	22	40	20	21,5	120	0,70	1,70
22.45.50.30	65	24	22	40	16	23,5	120	0,50	1,40
22.45.50.18	65	20	19	45	16	21,5	180	0,55	2,01
22.08.10	65	24	16	40	16	17,5	110	0,55	2,06
22.45.20.10A	65	24	22	45	16	17,5	120	0,73	3,21
22.44.30.10	70	22	18	46	20	21,5	180	0,73	

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

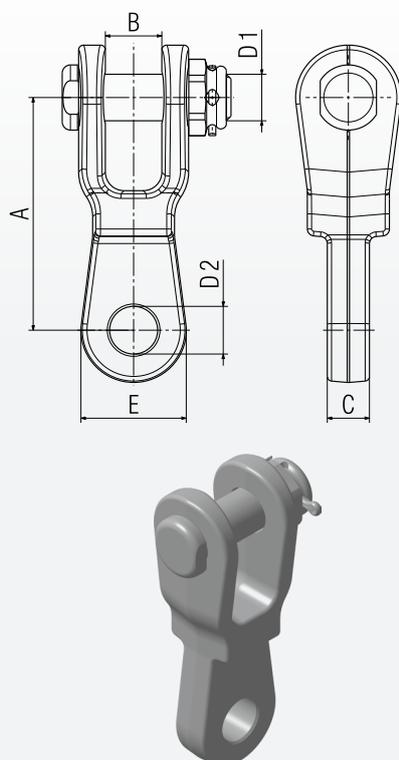


Clevis tongues 90° Vilice s očkom 90°

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	D1	D2			
22.46.10.10	100	24	19	45	16	17,5	120	1,00	1,70
22.46.10	100	24	19	45	20	21,5	210	1,08	1,40
43.22.09NG	100	28	22	45	20	21,5	160	1,06	2,01
43.22.09HD	100	24	22	45	20	23,5	210	1,07	2,06
43.22.24.9FD	120	24	22	54	22	30	210	1,60	3,21
43.22.24	120	24	22	54	22	23,5	320	1,64	

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

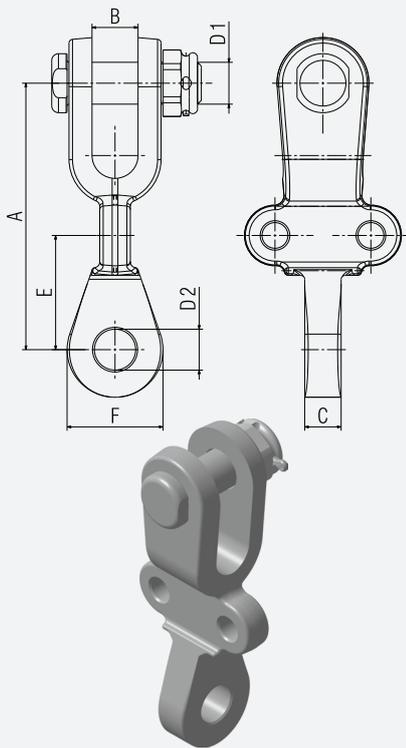


Clevis tongues 90° for arcing fittings Vilice s očkom 90° za zaštitne robove

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Size of coupling Zglobna veza [standard]	Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	F	D1	D2			
22.17.10.2	140	20	19	60	50	22	23,5	180	1,75
22.17.10.7	140	20	19	60	50	22	25,5	180	1,70
22.17.30C	140	20	19	60	50	16	17,5	120	1,50
22.17.30F	140	24	19	60	50	22	21,5	210	1,67
22.17.30FX	140	24	19	60	50	20	23,5	230	1,55

Material: drop forged steel, hot dip galvanized.
The hole distance is 50 mm for 2 bolts M12.
Other hole distances are available upon request.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Razmak provrta za dva vijka M12 iznosi 50 mm.
Ostali razmaci provrta dostupni su na zahtjev.
Ostale dimenzije dostupne su na zahtjev.

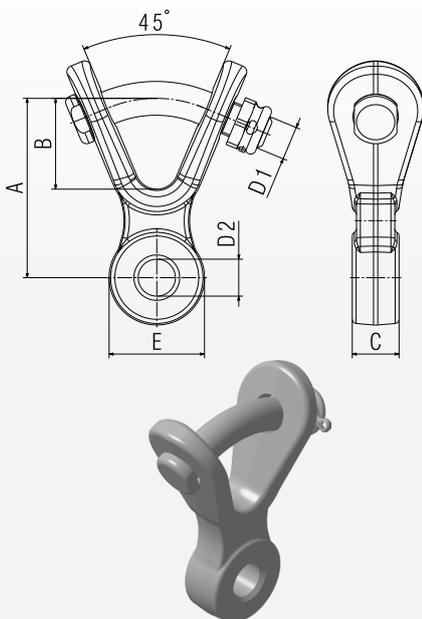


"Y" clevis tongues 90° "Y" vilice s očkom 90°

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	D1	D2		
22.78.10	85	43	22	45	20	21,5	120	1,00
22.78.10.3D	87	45	22	45	24	21,5	135	1,20
22.78.60.20	85	43	22	45	16	17,5	120	0,86
22.78.10.4D	129	40	22	54	24	21,5	135	1,95
22.78.80AX	100	40	19	45	22	23,5	250	1,21

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

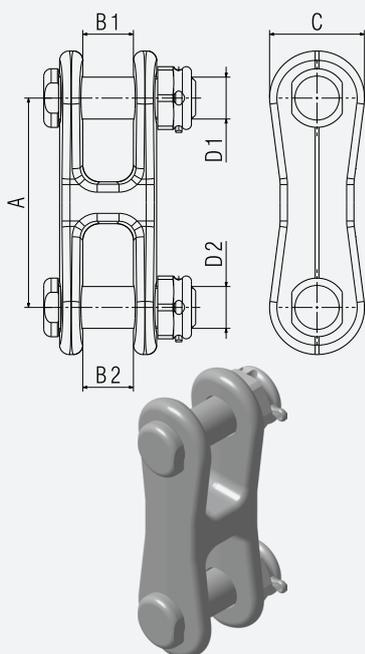


Double clevises Dvostruke vilice

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B1	B2	C	D1	D2		
22.84.10	100	24	24	45	20	20	200	1,39
22.84.30	100	24	24	45	16	20	120	1,25
22.92.10	120	24	24	50	22	22	240	1,84
22.92.10.30	120	26	24	50	22	22	320	1,85
22.92.50	120	24	24	50	16	20	120	1,66

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

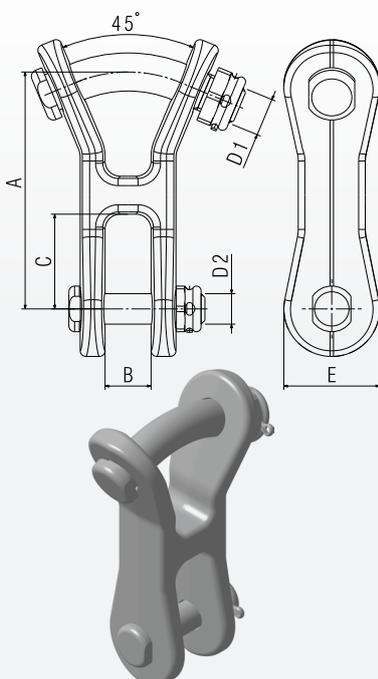


"V" double clevises "V" dvostruke vilice

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	D1	D2		
22.92.70	126	24	50	50	22	22	320	2,20
22.92.70.20	126	24	50	50	22	19	180	1,85
22.92.70.3	125	24	50	50	20	19	160	1,80
22.92.70.4	125	24	50	50	20	16	120	1,75

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

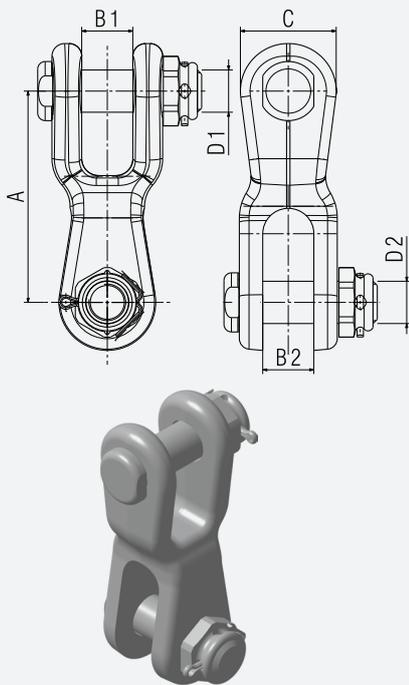


Double clevises 90° Dvostruke vilice 90°

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B1	B2	C	D1	D2		
22.99.10	100	24	24	45	20	20	200	1,60
22.99.40	100	24	24	45	16	16	120	1,65
22.93.20	120	24	24	54	20	22	160	1,90
22.93.30.3	120	24	26	54	22	22	320	2,00

Material: drop forged steel, hot dip galvanized.
The hole distance is 50 mm for 2 bolts M12.
Other hole distances are available upon request.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Razmak provrta za dva vijka M12 iznosi 50 mm.
Ostali razmaci provrta dostupni su na zahtjev.
Ostale dimenzije dostupne su na zahtjev.


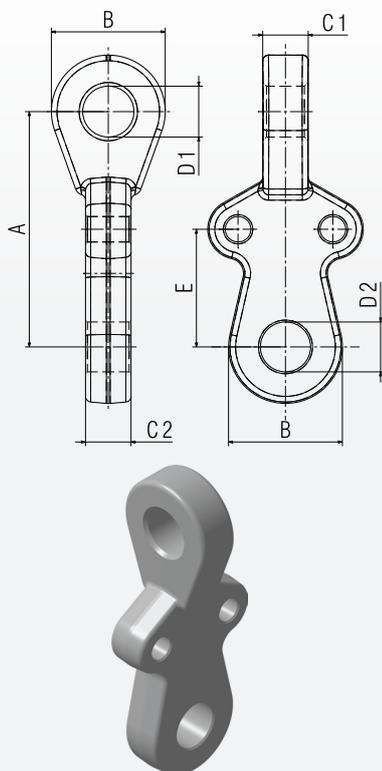


Double tongues 90° for arcing fittings Dvostruke očke 90° za zaštitne robove

Catalogue number Kataloški broj	Dimension Dimenzije [mm]							Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C1	C2	E	D1	D2		
22.36.50	125	55	19	19	62,5	23,5	23,5	250	1,13
22.36.50.90	125	55	19	19	62,5	21,5	21,5	180	1,15
22.36.40	125	60	24	24	62,5	26,5	26,5	360	1,55
22.36.40F	125	60	24	24	62,5	28,5	29,5	400	1,50
22.36.40A	125	60	24	24	62,5	23,5	26,5	320	1,58

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.





Yokes – triangular Odstojnici – trokutni

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B1	B2	C	D1		
29.01.70	70	60,6	22	17,5	17,5	120	1,40
29.42.13A	100	70	22	17,5	17,5	120	2,00
29.01.90	90	78	22	17,5	17,5	160	1,85
29.20.100	100	60	22	17,5	17,5	200	1,90

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

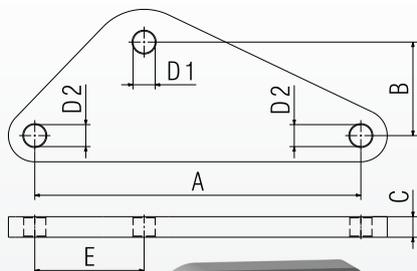


Yokes – triangular Odstojnici – trokutni

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B1	B2	C	D1	D2		
29.01.30	150	70	22	40	21,5	21,5	160	2,90
29.24.39B	390	125	25	130	24	24	240	11,50
29.32.35A	346	100	22	116	23,5	23,5	320	7,50
29.60.39.30A	390	120	25	130	35	29	600	12,05

Material: steel, hot dip galvanized.
Other dimensions are available upon request.


Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

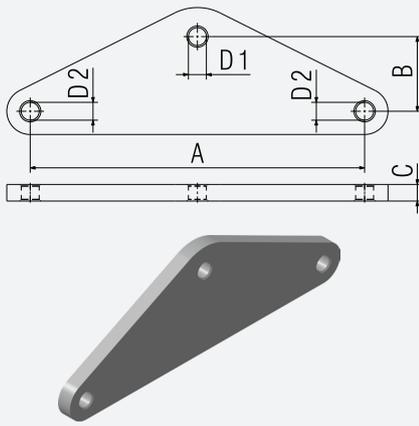

Yokes – triangular Odstojnici – trokutni

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>					Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	B	C	D1	D2		
29.02.20.40	200	70	22	17,5	17,5	120	3,15
29.03.30A	240	85	22	21,5	21,5	160	4,60
29.55.90.9	330	75	22	21,5	17,5	210	5,75
29.24.40CA	400	90	20	21,5	21,5	240	7,30
29.42.45.2AX	450	120	22	24	22	320	11,00
29.42.50.8A	500	140	22	28,5	21,5	420	12,90
29.60.45.9	450	150	25	32	23,5	600	15,25


Material: steel, hot dip galvanized.
Other dimensions are available upon request.
Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

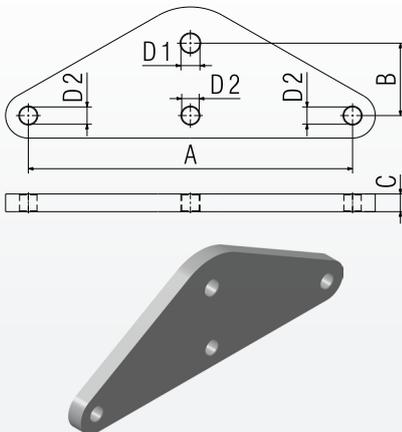

Yokes – triangular Odstojnici – trokutni

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>					Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	B	C	D1	D2		
29.02.50G	220	85	22	21,5	21,5	160	4,05
29.21.45.5	450	100	25	21,5	21,5	210	11,40
29.82.10.8C	400	90	22	23,5	21,5	240	8,25
29.25.15B	250	150	22	23,5	23,5	300	7,10

Material: steel, hot dip galvanized.
Other dimensions are available upon request.
Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

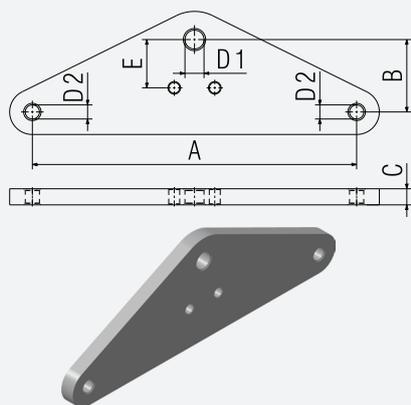

Yokes for arcing fittings – triangular Odstojnici za zaštitne rogove – trokutni

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	D1	D2		
29.12.20A	200	60	22	50	21,5	21,5	120	3,15
29.03.50.30	240	70	22	50	21,5	21,5	160	4,00
29.04.90	350	70	22	46	21,5	17,5	210	5,65
29.24.40.8	400	90	20	60	23,5	17,5	240	7,30
29.32.40.5B	400	120	22	60	23,5	21,5	320	8,75
29.45.20	450	140	22	80	29,5	21,5	420	11,70
29.60.45.9A	450	150	25	85	32	23,5	600	15,25

Material: steel, hot dip galvanized.

The hole distance is 50 mm for 2 bolts M12.

Other hole distances are available upon request.


Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.

Razmak provrta za dva vijka M12 iznosi 50 mm.

Ostali razmaci provrta dostupni su na zahtjev.

Ostale dimenzije dostupne su na zahtjev.

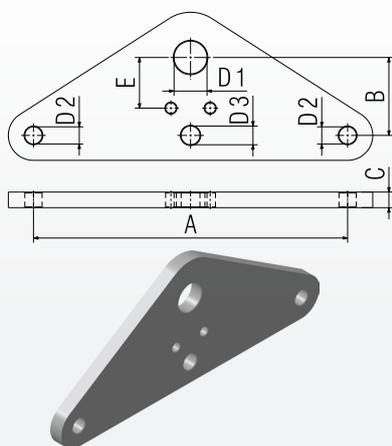

Yokes for arcing fittings – triangular Odstojnici za zaštitne rogove – trokutni

Catalogue number Kataloški broj	Dimension Dimenzije [mm]							Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	D1	D2	D3		
29.47.50	450	110	20	50	21,5	21,5	21,5	210	8,35
29.25.40A	400	100	20	65	42	22	24	250	8,00
29.14.60.30	500	120	22	70	23,5	21,5	21,5	300	10,30
29.42.45.7F	450	130	25	100	32	24	27	420	14,95

Material: steel, hot dip galvanized.

The hole distance is 50 mm for 2 bolts M12.

Other hole distances are available upon request.


Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.

Razmak provrta za dva vijka M12 iznosi 50 mm.

Ostali razmaci provrta dostupni su na zahtjev.

Ostale dimenzije dostupne su na zahtjev.

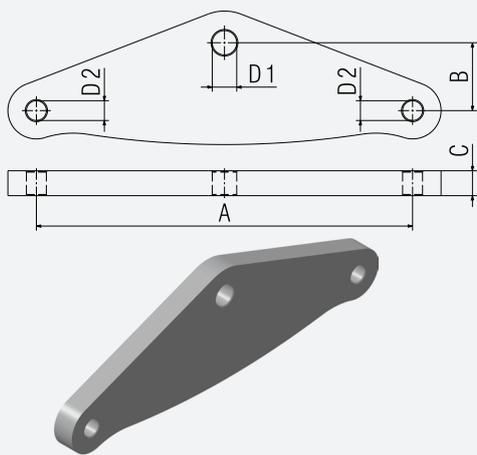


Yokes – triangular Odstojnici – trokutni

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D1	D2		
29.18.80.70D	457	80	18	17,5	17,5	160	6,30
29.18.80.80F	450	70	18	21,5	17,5	180	6,60
29.55.90C	330	60	22	21,5	17,5	210	5,15
29.82.10.7A	400	85	22	23,5	21,5	320	8,20
29.18.80.90A	457	130	22	23,5	21,5	360	10,95

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

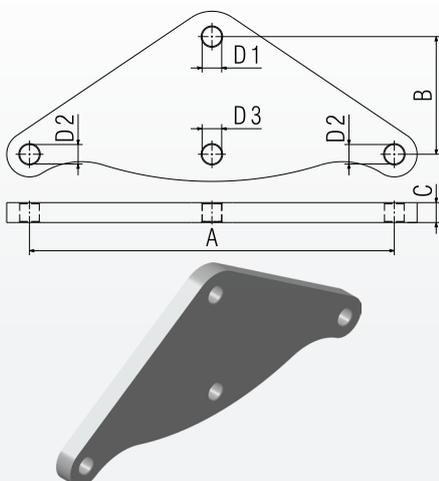


Yokes – triangular Odstojnici – trokutni

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D1	D2	D3		
29.53.90E	330	50	22	17,5	17,5	19,5	120	4,90
29.100.32A	400	130	22	21,5	21,5	21,5	160	8,40
29.42.60.7A	600	150	22	28,5	23,5	25	420	16,70
29.100.32	400	130	22	28,5	21,5	28,5	480	11,85
29.60.45.9F	450	150	25	32	24	35	600	16,00

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

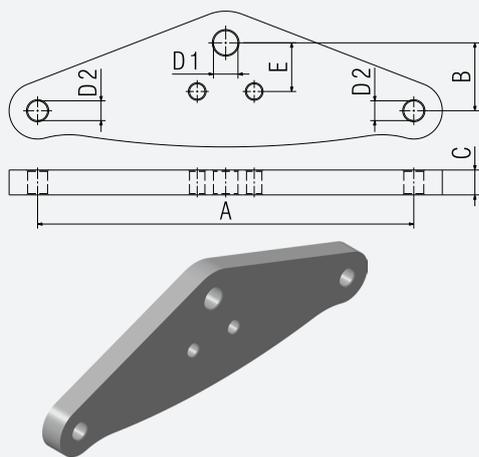

Yokes for arcing fittings – triangular Odstojnici za zaštitne robove – trokutni

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	D1	D2		
29.55.90	330	60	22	43	21,5	17,5	210	5,20
29.82.10B	400	65	22	65	23,5	21,5	320	7,45
29.07.20.20	457	150	22	115	30	21,5	450	11,85
29.99.40.20	450	160	22	90	34	24	600	13,20

Material: steel, hot dip galvanized.

The hole distance is 50 mm for 2 bolts M12.

Other hole distances are available upon request.


Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.

Razmak provrta za vijka M12 iznosi 50 mm.

Ostali razmaci provrta dostupni su na zahtjev.

Ostale dimenzije dostupne su na zahtjev.

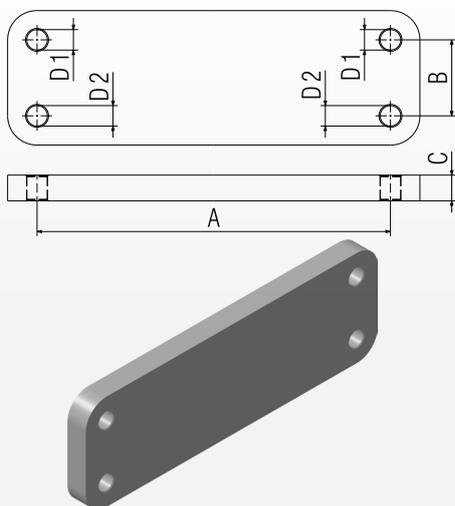

Yokes – rectangular Odstojnici – pravokutni


Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D1	D2		
29.35.20.90	300	65	22	17,5	17,5	120	6,90
29.35.20.20	400	65	22	17,5	17,5	240	8,85
29.35.20.40	350	65	22	21,5	21,5	320	7,90
29.10.45	450	100	22	23,5	23,5	430	13,55
29.62.45	450	100	22	26,5	26,5	620	15,10

Material: steel, hot dip galvanized.

Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.

Ostale dimenzije dostupne su na zahtjev.

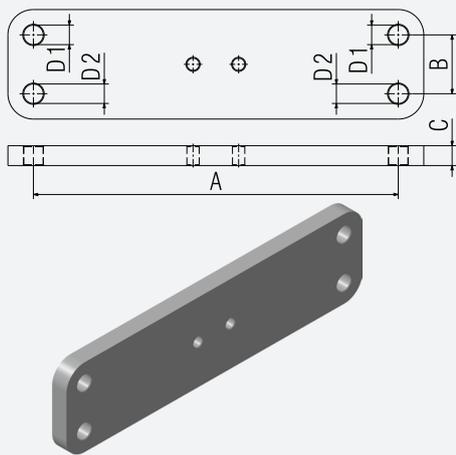

Yokes for arcing fittings – rectangular Odstojnici za zaštitne robove – pravokutni

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D1	D2		
29.35.60.20	400	65	22	17,5	17,5	240	8,85
29.96.10B	400	65	22	21,5	21,5	320	9,40
29.96.10C	400	64	22	21,5	21,5	420	9,30
29.62.45.2E	400	90	22	23,5	23,5	600	12,15

Material: steel, hot dip galvanized.

The hole distance is 50 mm for 2 bolts M12.

Other hole distances are available upon request.


Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.

Razmak provrta za dva vijka M12 iznosi 50 mm.

Ostali razmaci provrta dostupni su na zahtjev.

Ostale dimenzije dostupne su na zahtjev.

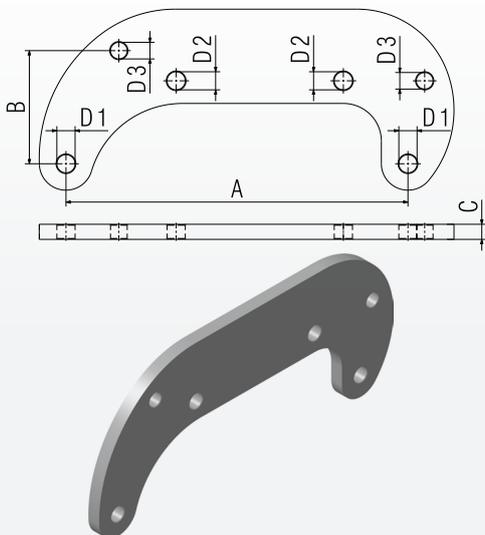

Yokes Odstojnici


Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D1	D2	D3		
29.42.45.5D	450	150	20	22	24	22	210	12,25
29.30.45	450	150	20	24	24	29	300	12,50
29.21.45.8	450	150	20	24	24	22	420	11,70
29.42.45F	450	150	25	30	24	30	840	15,90

Material: steel, hot dip galvanized.

Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.

Ostale dimenzije dostupne su na zahtjev.

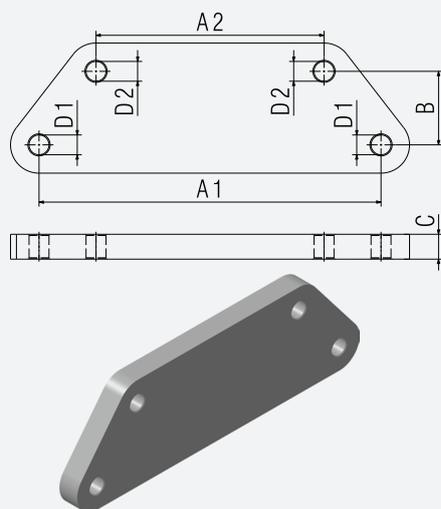

Yokes – trapezoidal Odstojnici – trapezni


Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A1	A2	B	C	D1	D2		
29.09.10.20	400	330	60	22	17,5	17,5	200	7,90
29.42.20.4	450	250	70	18	21,5	21,5	240	7,90
29.42.20.2	368	200	120	20	22	22	420	9,65
29.62.45.2	580	450	100	22	26,5	26,5	620	17,30
29.40.50.55	550	500	150	22	26,5	26,5	800	24,00

Material: steel, hot dip galvanized.

Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.

Ostale dimenzije dostupne su na zahtjev.

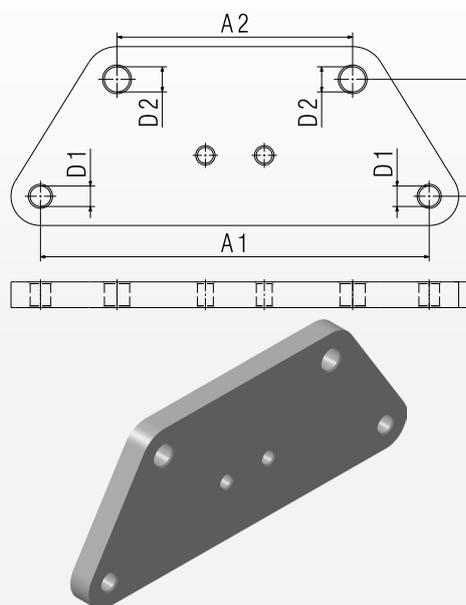

Yokes for arcing fittings – trapezoidal Odstojnici za zaštitne rogeve – trapezni

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A1	A2	B	C	D1	D2		
29.06.45.2	330	200	100	22	21,5	21,5	200	8,65
29.06.45.4	330	200	100	22	17,5	21,5	210	8,40
29.24.40.2A	400	200	100	22	21,5	21,5	240	9,60
29.06.45	400	200	70	22	17,5	17,5	240	7,60
29.32.40.1	450	400	70	22	21,5	21,5	320	9,70

Material: steel, hot dip galvanized.

The hole distance is 50 mm for 2 bolts M12.

Other hole distances are available upon request.


Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.

Razmak provrta za dva vijka M12 iznosi 50 mm.

Ostali razmaci provrta dostupni su na zahtjev.

Ostale dimenzije dostupne su na zahtjev.

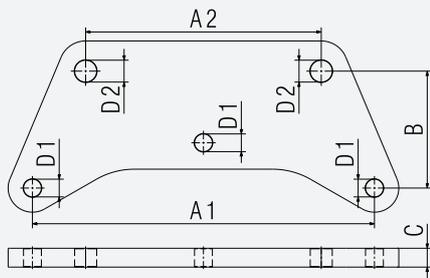


Yokes – trapezoidal Odstojnici – trapezni

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>						Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A1	A2	B	C	D1	D2		
29.42.45.5A	450	310	155	20	23,5	21,5	300	12,00
29.30.45.5	450	305	155	20	23,5	29	420	12,40
29.42.45.5H	450	310	155	25	23,5	29	600	16,00
29.62.45.2	580	450	100	22	26,5	26,5	620	17,30

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

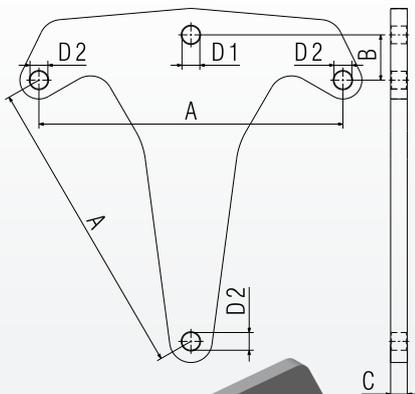


Yokes – triple bundle Odstojnici – trostruki snop

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>					Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	B	C	D1	D2		
43.29.42.20	400	60	22	21,5	21,5	210	12,70
43.29.42.2J	400	60	22	23,5	23,5	320	12,50

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

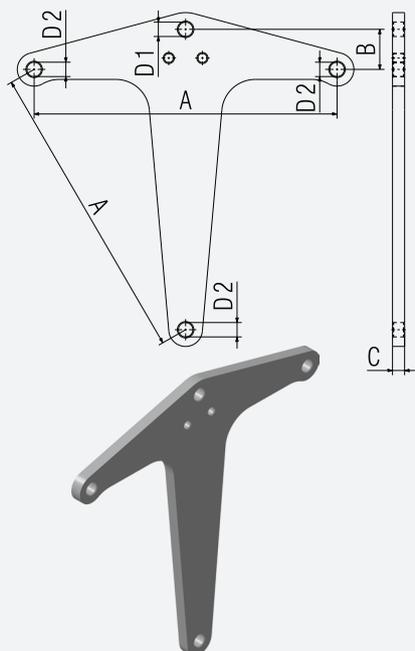

Yokes for arcing fittings – triple bundle Odstojnici za zaštitne rogove – trostruki snop

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>					Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	B	C	D1	D2		
43.29.69.6	450	60	18	21,5	21,5	120	9,55
43.29.540	200	90	22	21,5	21,5	160	8,15
43.29.42A	400	60	22	17,5	17,5	160	11,40
43.29.69.8	457	60	18	21,5	21,5	160	10,85

Material: steel, hot dip galvanized.

The hole distance is 50 mm for 2 bolts M12.

Other hole distances are available upon request.


Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.

Razmak provrta za vijka M12 iznosi 50 mm.

Ostali razmaci provrta dostupni su na zahtjev.

Ostale dimenzije dostupne su na zahtjev.

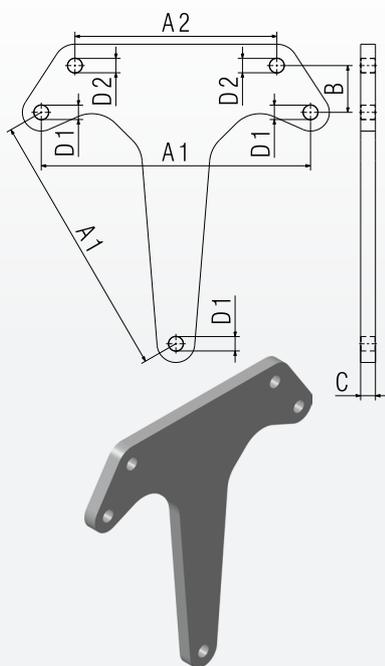

Yokes – triple bundle Odstojnici – trostruki snop


Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>						Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A1	A2	B	C	D1	D2		
43.29.75.20	457	240	50	18	17,5	21,5	240	11,20
43.29.75.50B	400	300	70	22	21,5	21,5	420	13,50

Material: steel, hot dip galvanized.

Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.

Ostale dimenzije dostupne su na zahtjev.

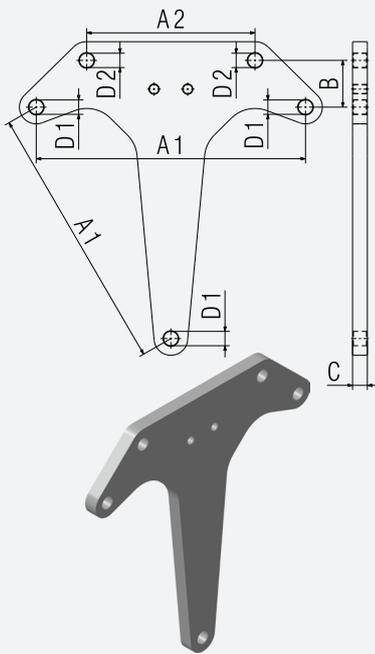

Yokes for arcing fittings – triple bundle Odstojnici za zaštitne robove – trostruki snop

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>						Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A1	A2	B	C	D1	D2		
43.29.75.50	400	250	70	22	21,5	21,5	320	12,45
43.29.67.4	457	436	67	18	21,5	21,5	320	13,50
43.29.67.5	457	505	67	18	21,5	21,5	320	15,20

Material: steel, hot dip galvanized.

The hole distance is 50 mm for 2 bolts M12.

Other hole distances are available upon request.


Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.

Razmak provrta za dva vijka M12 iznosi 50 mm.

Ostali razmaci provrta dostupni su na zahtjev.

Ostale dimenzije dostupne su na zahtjev.

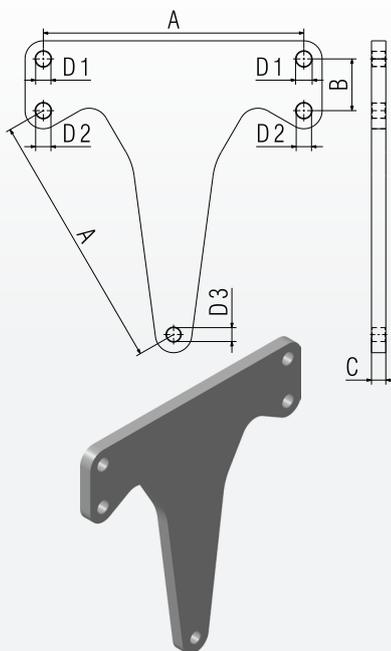

Yokes – triple bundle Odstojnici – trostruki snop


Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>						Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	B	C	D1	D2	D3		
43.29.43.40	400	70	22	21,5	21,5	21,5	210	14,20
43.29.67.9G	400	80	22	23,5	23,5	21,5	320	13,45

Material: steel, hot dip galvanized.

Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.

Ostale dimenzije dostupne su na zahtjev.

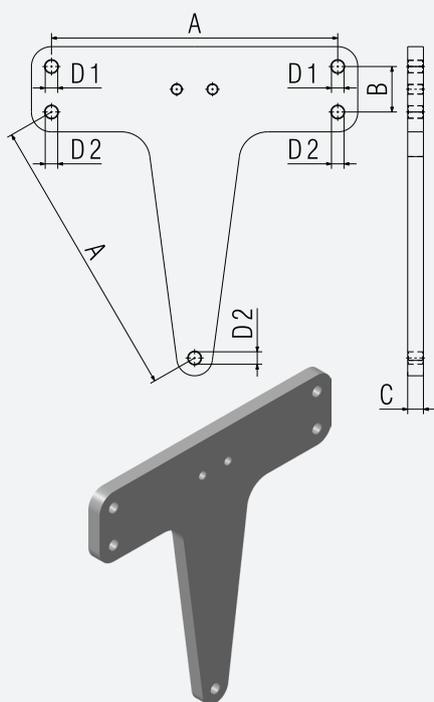

Yokes for arcing fittings – triple bundle Odstojnici za zaštitne robove – trostruki snop

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D1	D2		
43.29.43	400	64	22	21,5	21,5	210	14,90
43.29.43.2D	400	64	22	17,5	17,5	320	15,30
43.29.43D	400	64	22	21,5	21,5	320	15,30
43.29.68.3	457	57	22	21,5	21,5	320	15,00

Material: steel, hot dip galvanized.

The hole distance is 50 mm for 2 bolts M12.

Other hole distances are available upon request.


Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.

Razmak provrta za vijka M12 iznosi 50 mm.

Ostali razmaci provrta dostupni su na zahtjev.

Ostale dimenzije dostupne su na zahtjev.

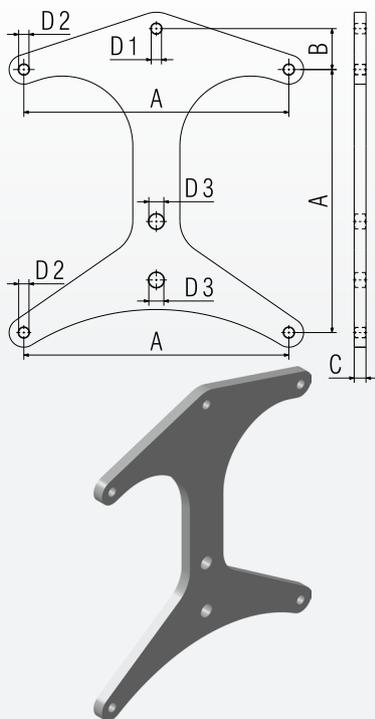

Yokes – quad bundle Odstojnici – četverostruki snop


Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D1	D2	D3		
29.45.80.4	457	30	20	21,5	21,5	26	120	16,30
43.29.802.3B	450	70	20	17,5	17,5	25,5	120	17,00
43.29.141G	450	80	16	21,5	17,5	24	210	14,00

Material: steel, hot dip galvanized.

Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.

Ostale dimenzije dostupne su na zahtjev.

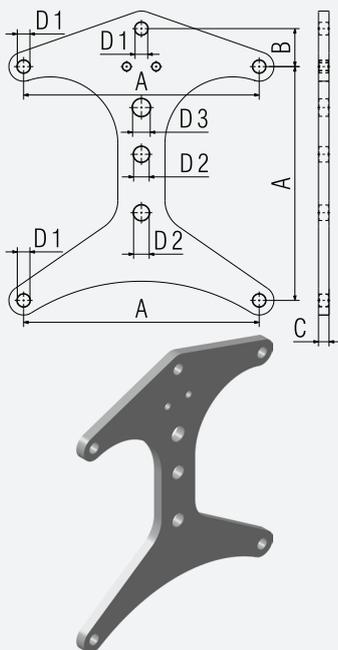

Yokes for arcing fittings – quad bundle Odstojnici za zaštitne robove – četverostruki snop

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D1	D2	D3		
43.29.141.9	400	65	18	21,5	26,5	30	180	13,30
43.29.141.8	450	65	18	21,5	25	30	180	13,95
43.29.141.7B	457	65	20	21,5	25	30	180	16,10
43.29.141.6	450	65	22	21,5	25	30	180	17,50

Material: steel, hot dip galvanized.

The hole distance is 50 mm for 2 bolts M12.

Other hole distances are available upon request.


Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.

Razmak provrta za dva vijka M12 iznosi 50 mm.

Ostali razmaci provrta dostupni su na zahtjev.

Ostale dimenzije dostupne su na zahtjev.

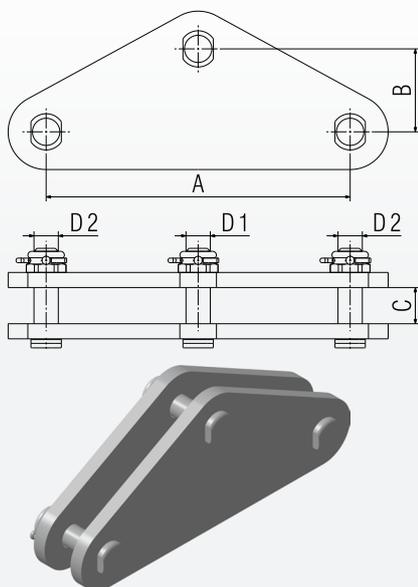

Yokes – triangular double Odstojnici – trokutni dvostruki


Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D1	D2		
29.12.20.2	200	55	24	16	16	120	3,25
29.30.40.20	200	120	24	20	20	160	4,20
29.21.20A	200	120	24	16	22	210	5,25
29.99.70B	400	90	22	20	20	240	7,80
29.23.55	550	120	20	22	20	320	14,25
29.97.90.2L	500	130	26	25	25	420	14,50

Material: steel, hot dip galvanized.

Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.

Ostale dimenzije dostupne su na zahtjev.

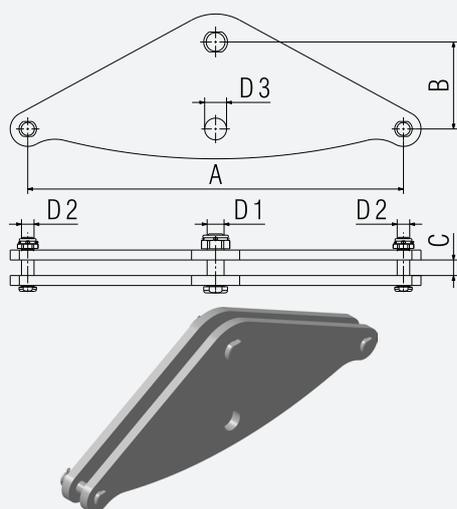


Yokes – triangular double Odstojnici – trokutni dvostruki

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D1	D2	D3		
29.42.60.3A	600	140	25	27	20	35	420	24,30
29.84.45.2A	450	200	43	39	30	38	840	36,30
29.84.60.3	600	170	32	39	30	35	840	37,45

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

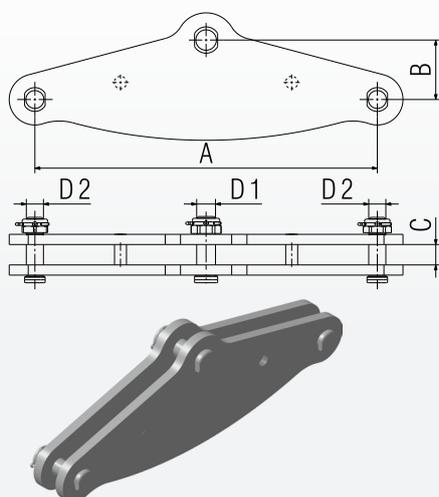


Yokes – triangular double Odstojnici – trokutni dvostruki

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D1	D2		
43.29.49.80	200	50	24	19	19	120	2,50
29.52.60	200	50	20	19	19	160	2,95
43.29.494	400	70	20	20	16	210	6,85
29.24.45.2C	450	50	20	22	20	240	8,25
43.29.453	400	70	24	22	20	320	8,80
43.29.432.3	400	90	26	22	20	320	7,40

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

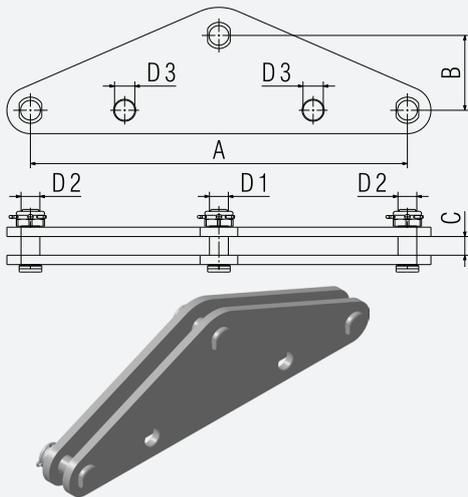


Yokes – triangular double Odstojnici – trokutni dvostruki

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D1	D2	D3		
29.16.40.5B	400	80	20	20	20	21,5	160	6,90
29.38.10D	400	110	24	22	20	30	210	8,95
29.24.45C	450	120	20	22	20	25	240	9,35
29.32.45.9B	450	120	24	25	20	25	320	9,70
29.97.90.2C	500	130	24	25	20	25	420	14,00
29.80.60.2	600	180	30	39	30	24	800	33,20

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

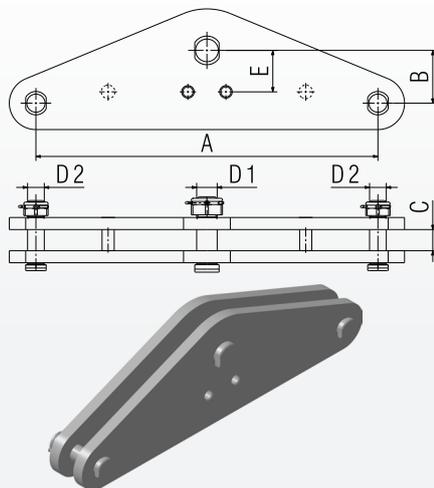


Yokes for arcing fittings – triangular double Odstojnici za zaštitne robove – trokutni dvostruki

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	D1	D2		
43.29.214.6F	450	120	24	60	22	20	320	10,50
29.42.45H	450	70	28	55	27	22	420	15,60
29.60.45.3H	450	120	28	70	33	22	600	20,25

Material: steel, hot dip galvanized.
The hole distance is 50 mm for 2 bolts M12.
Other hole distances are available upon request.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Razmak provrta za dva vijka M12 iznosi 50 mm.
Ostali razmaci provrta dostupni su na zahtjev.
Ostale dimenzije dostupne su na zahtjev.

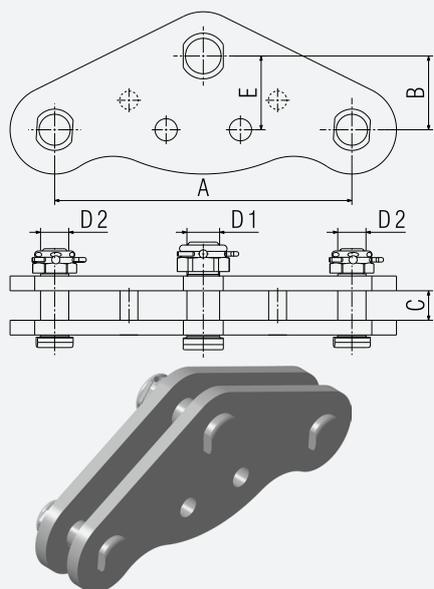

Yokes for arcing fittings – triangular double

Odstojnici za zaštitne rogove – trokutni dvostruki

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>						Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	B	C	E	D1	D2		
43.29.448.80	400	50	20	50	16	16	120	4,60
43.29.740	200	50	20	50	19	19	160	2,85
29.21.20.4	200	50	20	50	22	19	210	3,65
43.29.229.20	400	100	30	100	32	22	560	11,15

Material: steel, hot dip galvanized.

The hole distance is 50 mm for 2 bolts M12.

Other hole distances are available upon request.


Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.

Razmak provrta za dva vijka M12 iznosi 50 mm.

Ostali razmaci provrta dostupni su na zahtjev.

Ostale dimenzije dostupne su na zahtjev.

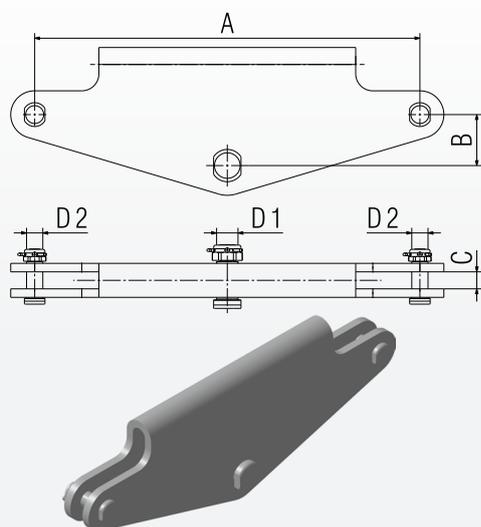

Yokes – triangular bended

Odstojnici – trokutni savijeni


Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>						Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	B	C	D1	D2			
29.97.40.60	400	60	20	16	16	120	4,85	
29.97.30.6C	400	60	20	19	19	160	6,05	
29.97.31.50	400	60	20	20	20	210	6,50	
29.99.90.40	450	60	20	22	20	230	8,00	
29.97.50.90	457	68	24	22	20	320	10,60	
29.51.30	650	110	24	28	19	420	19,35	

Material: steel, hot dip galvanized.

Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.

Ostale dimenzije dostupne su na zahtjev.

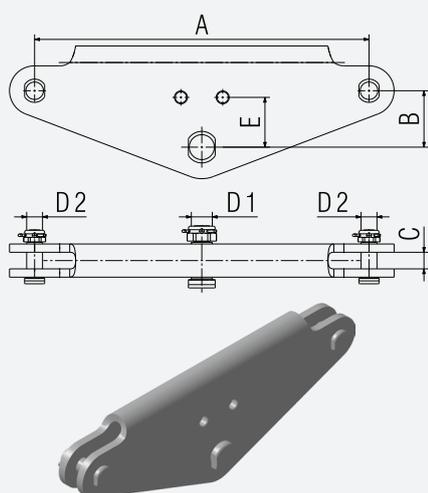


Yokes for arcing fittings – triangular bended

Odstojnici za zaštitne rogove – trokutni savijeni

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	D1	D2		
29.97.20.60	330	50	20	50	16	16	120	3,40
29.97.30.80	400	60	20	60	20	20	160	6,00
29.97.30.50	400	60	20	60	20	20	210	6,80
29.99.90.80	450	90	20	50	22	22	230	7,80
29.97.70.50	600	125	21	75	25	20	320	14,85
29.97.31.20	400	60	20	60	25	19	360	8,40

Material: steel, hot dip galvanized. The hole distance is 50 mm for 2 bolts M12. Other hole distances are available upon request. Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan. Razmak provrta za dva vijka M12 iznosi 50 mm. Ostali razmaci provrta dostupni su na zahtjev. Ostale dimenzije dostupne su na zahtjev.

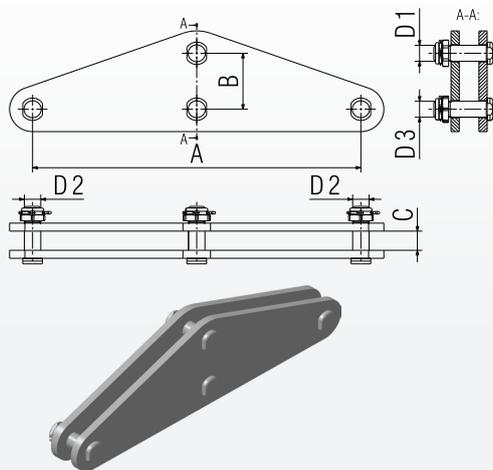


Yokes – triangular double

Odstojnici – trokutni dvostruki

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D1	D2	D3		
29.99.70.30A	400	70	24	20	20	20	160	10,05
29.24.40.7A	400	110	20	22	20	16	240	7,85
29.98.30A	500	120	24	22	20	22	320	11,50
29.42.60.48	1000	120	24	27	20	20	480	48,40

Material: steel, hot dip galvanized. Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan. Ostale dimenzije dostupne su na zahtjev.

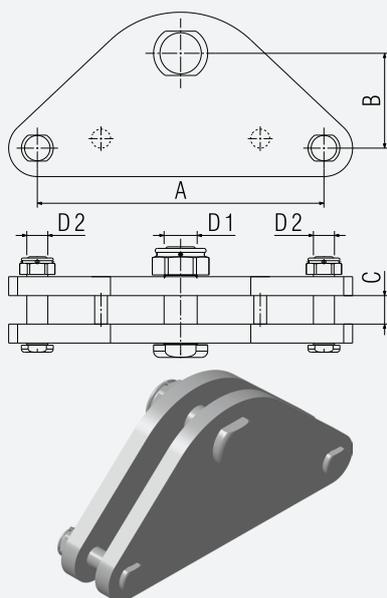


Yokes – triangular double Odstojnici – trokutni dvostruki

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>					Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	B	C	D1	D2		
29.84.45.3	450	150	54	39	33	840	32,90
29.88.45.3E	450	140	32	36	30	880	26,15
29.120.45.2	450	150	45	52	33	1200	51,90
29.176.450A	450	150	54	55	39	1760	56,35

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

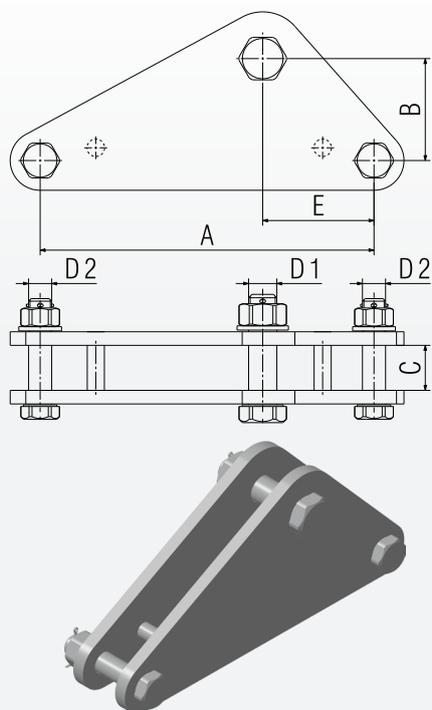


Yokes – triangular double Odstojnici – trokutni dvostruki

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>						Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	B	C	E	D1	D2		
29.32.40.9F	400	200	26	147	25	20	320	12,35
29.42.17.30	173	120	28	58	33	27	420	7,80
29.120.52.2	519	150	32	173	45	30/39	1200	38,40

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

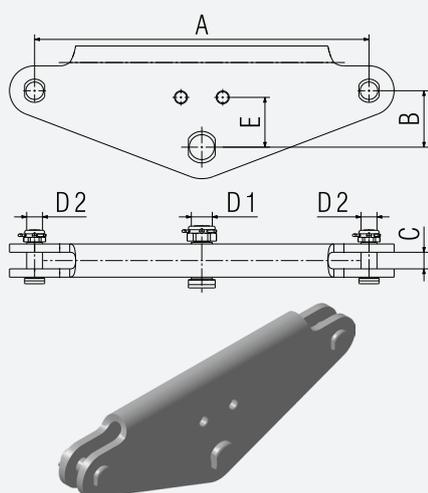


Yokes for arcing fittings – triangular bended

Odstojnici za zaštitne rogove – trokutni savijeni

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	D1	D2		
29.97.20.60	330	50	20	50	16	16	120	3,40
29.97.30.80	400	60	20	60	20	20	160	6,00
29.97.30.50	400	60	20	60	20	20	210	6,80
29.99.90.80	450	90	20	50	22	22	230	7,80
29.97.70.50	600	125	21	75	25	20	320	14,85
29.97.31.20	400	60	20	60	25	19	360	8,40

Material: steel, hot dip galvanized. The hole distance is 50 mm for 2 bolts M12. Other hole distances are available upon request. Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan. Razmak provrta za dva vijka M12 iznosi 50 mm. Ostali razmaci provrta dostupni su na zahtjev. Ostale dimenzije dostupne su na zahtjev.

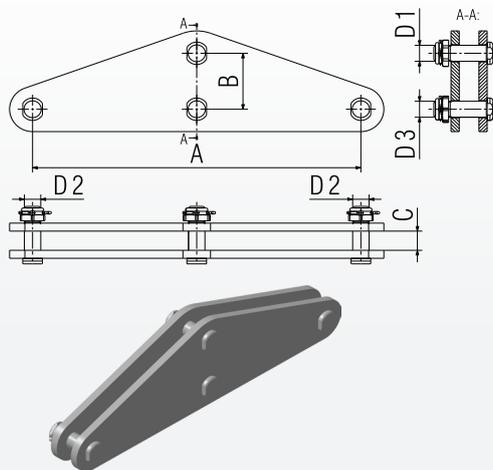


Yokes – triangular double

Odstojnici – trokutni dvostruki

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D1	D2	D3		
29.99.70.30A	400	70	24	20	20	20	160	10,05
29.24.40.7A	400	110	20	22	20	16	240	7,85
29.98.30A	500	120	24	22	20	22	320	11,50
29.42.60.48	1000	120	24	27	20	20	480	48,40

Material: steel, hot dip galvanized. Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan. Ostale dimenzije dostupne su na zahtjev.

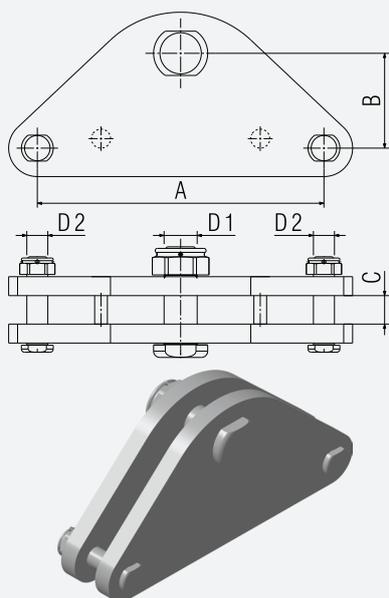


Yokes – triangular double Odstojnici – trokutni dvostruki

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D1	D2		
29.84.45.3	450	150	54	39	33	840	32,90
29.88.45.3E	450	140	32	36	30	880	26,15
29.120.45.2	450	150	45	52	33	1200	51,90
29.176.450A	450	150	54	55	39	1760	56,35

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

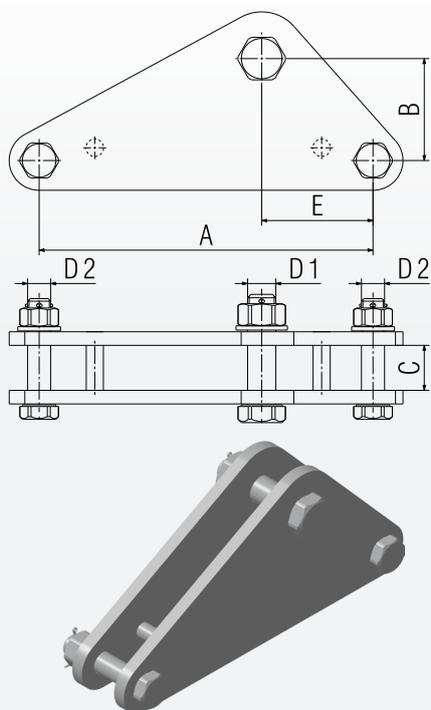


Yokes – triangular double Odstojnici – trokutni dvostruki

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	E	D1	D2		
29.32.40.9F	400	200	26	147	25	20	320	12,35
29.42.17.30	173	120	28	58	33	27	420	7,80
29.120.52.2	519	150	32	173	45	30/39	1200	38,40

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

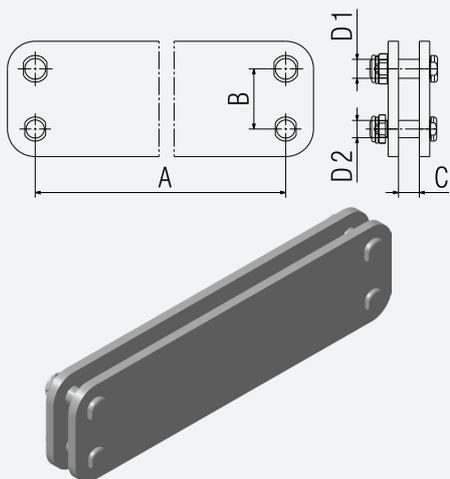

Yokes – rectangular double Odstojnici – pravokutni dvostruki


Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D1	D2		
43.29.172A	200	75	22	20	20	160	4,90
29.99.80.30	400	70	20	20	16	240	7,80
43.29.471A	400	70	24	20	20	240	10,50
43.29.509A	500	70	24	20	20	320	12,00
43.29.509C	450	70	24	22	20	640	14,50

Material: steel, hot dip galvanized.

Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.

Ostale dimenzije dostupne su na zahtjev.

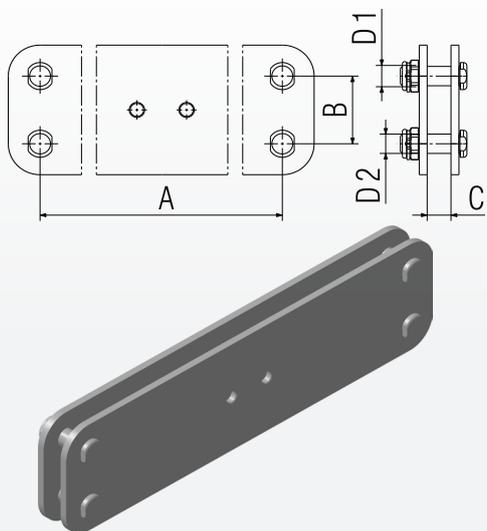

Yokes for arcing fittings – rectangular double Odstojnici za zaštitne rogeve – pravokutni dvostruki

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D1	D2		
43.29.170C	457	70	24	20	20	240	8,15

Material: steel, hot dip galvanized.

The hole distance is 50 mm for 2 bolts M12.


Other hole distances are available upon request. Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.

Razmak provrta za dva vijka M12 iznosi 50 mm.

Ostali razmaci provrta dostupni su na zahtjev.

Ostale dimenzije dostupne su na zahtjev.

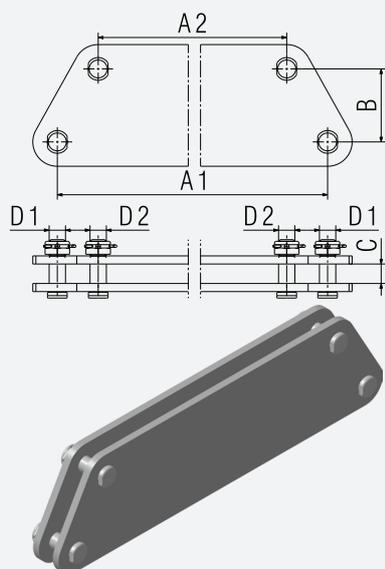


Yokes – trapezoidal double Odstojnici – trapezni dvostruki

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>						Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	A1	B	C	D1	D2		
29.99.80.20	500	400	60	20	20	16	240	8,50
29.64.40.50	500	400	100	26	25	20	320	16,95
29.99.99F	500	400	90	24	20	20	420	12,80
29.99.80Z	600	450	120	26	25	25	640	24,15
29.46.55E	550	500	120	26	27	27	800	27,15

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

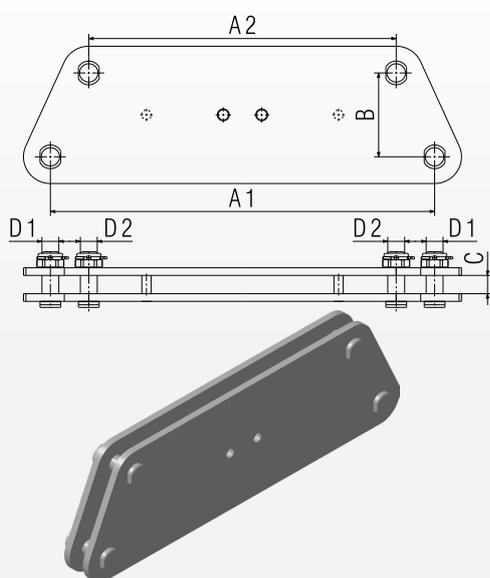


Yokes for arcing fittings – trapezoidal double Odstojnici za zaštitne robove – trapezni dvostruki

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>						Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	A1	B	C	D1	D2		
29.20.10.20	400	200	90	24	20	20	240	9,50
29.99.80E	600	400	110	24	22	20	320	15,60
29.99.80K	500	400	110	24	22	22	600	15,60

Material: steel, hot dip galvanized.
The hole distance is 50 mm for 2 bolts M12.
Other hole distances are available upon request. Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Razmak provrta za dva vijka M12 iznosi 50 mm.
Ostali razmaci provrta dostupni su na zahtjev.
Ostale dimenzije dostupne su na zahtjev.

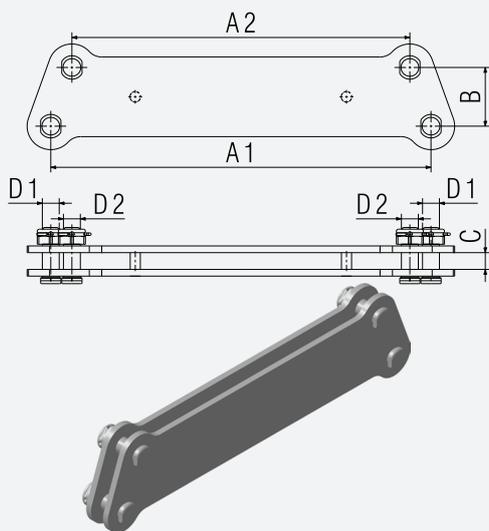

Yokes – trapezoidal double Odstojnici – trapezni dvostruki


Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A1	A2	B	C	D1	D2		
29.98.90.50	450	400	70	20	20	20	260	7,10
29.98.10.60	600	450	90	20	20	20	320	10,30
29.98.90.30	500	450	65	20	22	20	460	9,70
29.98.10.50	600	450	90	20	22	22	600	14,95

Material: steel, hot dip galvanized.

Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.

Ostale dimenzije dostupne su na zahtjev.

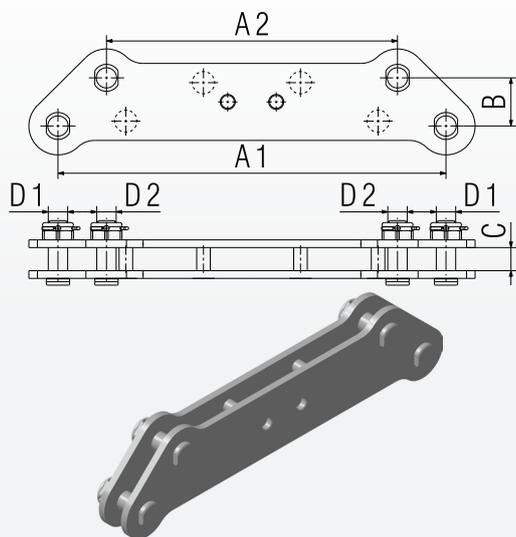

Yokes for arcing fittings – trapezoidal double Odstojnici za zaštitne robove – trapezni dvostruki

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A1	A2	B	C	D1	D2		
29.98.90.40	400	100	70	20	19	22	160	6,00
43.29.447.20	400	300	50	24	20	20	160	5,80
43.29.679.2	400	200	70	20	19	19	160	4,70
43.29.679	400	200	70	20	20	20	180	5,00

Material: steel, hot dip galvanized.

The hole distance is 50 mm for 2 bolts M12.


Other hole distances are available upon request. Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.

Razmak provrta za dva vijka M12 iznosi 50 mm.

Ostali razmaci provrta dostupni su na zahtjev.

Ostale dimenzije dostupne su na zahtjev.

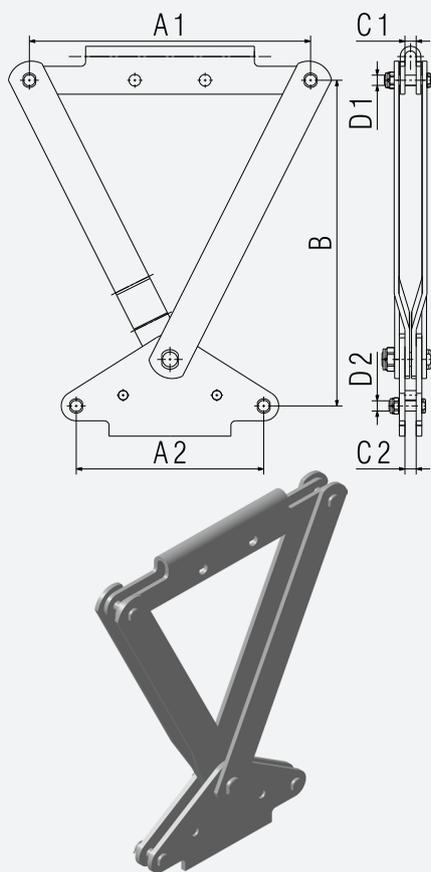


Yokes Odstojnici

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>							Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A1	A2	B	C1	C2	D1	D2		
43.29.127.4	600	400	700	24	24	22	22	450	42,05
43.29.127.1	600	450	700	26	22	25	25	620	46,00
43.29.127.3	600	400	700	26	24	25	25	620	44,35
43.29.127.5	600	450	700	26	24	25	25	620	45,90

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

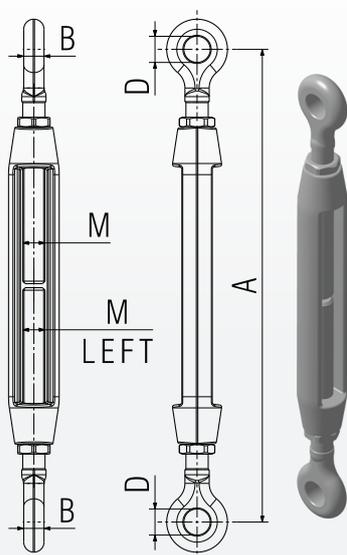


Turnbuckles eye – eye Zatezači očka – očka

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>				Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A(min.-max.)	B	M	D		
25.29.001	300 – 440	14	16	22	65	1,55
25.39.001	424 – 630	16	20	38	80	3,70
25.49.088.2	470 – 720	20	22	26	112	3,85
25.59.034	430 – 670	20	24	26	160	3,90

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

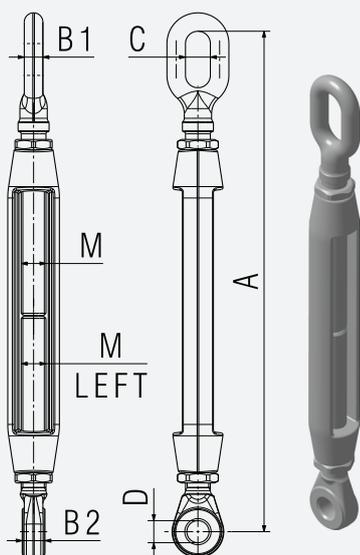


Turnbuckles chain link – tongue Zatezači karika – očka

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A(min.-max.)	B1	B2	C	M	D		
25.24.011	365 – 500	14	16	20	16	17,5	65	1,90
25.34.015	480 – 710	14	22	20	20	17,5	98	3,15
25.44.023	495 – 715	18	18	24	22	17,5	120	3,90
25.44.024B	495 – 715	18	18	24	22	21,5	135	4,00
25.74.026	500 – 730	18	22	22	24	21,5	160	3,70

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

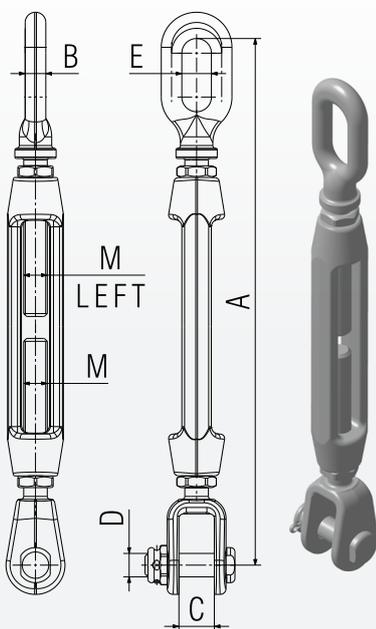


Turnbuckles chain link – clevis Zatezači karika – vilica

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A(min.-max.)	B1	B2	C	M	D		
25.22.025	360 – 475	14	24	20	16	16	65	1,85
25.42.023	500 – 730	18	20	24	22	16	120	3,60
25.42.025	500 – 730	18	24	24	22	16	120	3,75
25.72.026	500 – 730	18	24	24	24	20	160	4,40
25.72.026.3X	500 – 720	20	24	24	24	20	210	4,75

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

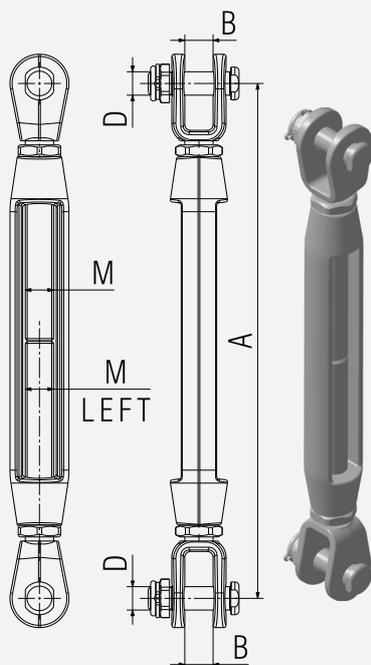


Turnbuckles clevis – clevis Zatezači vilica – vilica

Catalogue number Kataloški broj	Dimension Dimenzije [mm]				Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A(min.-max.)	B	M	D		
25.25.011	330 – 470	18	16	16	65	1,80
25.35.011	440 – 670	18	20	16	98	3,90
25.45.066.5	440 – 660	24	22	20	120	4,40
25.75.066.2	440 – 670	24	24	20	160	4,40
25.75.066X	440 – 670	24	24	20	210	4,35

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

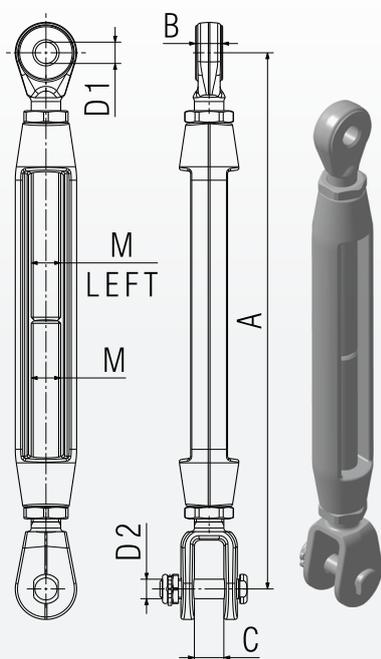


Turnbuckles tongue – clevis Zatezači očka – vilica

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A(min.-max.)	B1	B2	C	M	D		
25.27.015	330 – 470	16	24	16	17,5	16	65	1,80
25.37.013	440 – 670	16	20	20	17,5	16	98	3,30
25.77.055	440 – 670	22	24	24	17,5	16	120	4,10
25.47.056	440 – 670	22	24	22	17,5	20	135	3,75
25.77.064	440 – 670	22	20	24	21,5	20	160	4,40
25.77.066.4AX	440 – 670	19	24	24	23,5	20	210	4,25

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

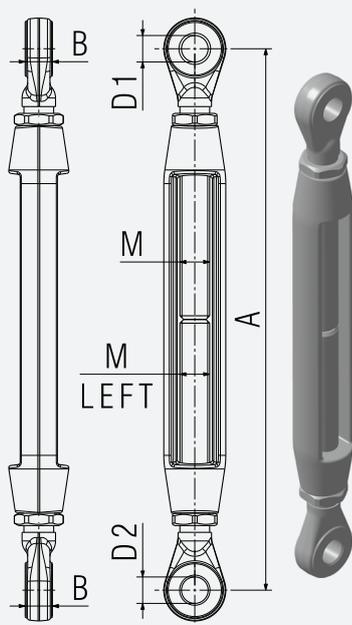


Turnbuckles tongue – tongue Zatezači očka – očka

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A(min.-max.)	B	M	D1	D2		
25.29.011	330 – 445	16	16	17,5	17,5	65	1,55
25.39.022	440 – 670	16	20	21,5	21,5	98	2,80
25.49.034A	440 – 670	18	22	20,5	17,5	120	3,70
25.79.066.2E	440 – 670	22	24	21,5	17,5	160	3,85
25.79.066X	440 – 670	22	24	21,5	21,5	210	3,85
25.69.077.2	440 – 665	19	27	24	24	210	4,50

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

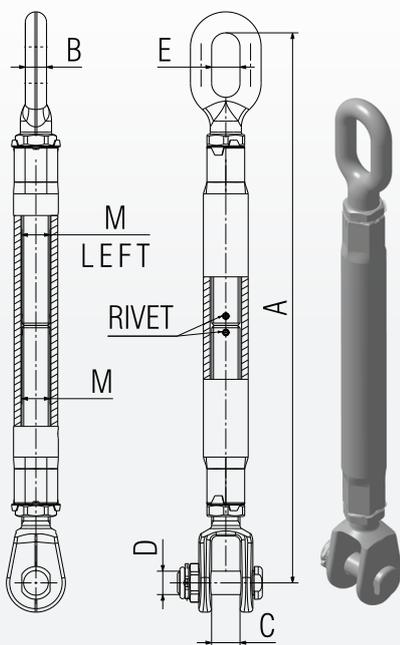


Turnbuckles chain link – clevis Zatezači karika – vilica

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A(min.-max.)	B	C	E	M	D		
25.96.012	430 – 565	18	22	25	18	18	70	3,00
25.92.824.2	370 – 460	18	14	24	24	20	120	3,05
25.92.826.2	430 – 565	18	24	24	24	20	160	3,50
25.92.824	590 – 890	18	20	24	24	20	210	5,30
25.99.848A	450 – 585	19	20	39	24	19	240	3,75

Material: steel tube, drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelična cijev, kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

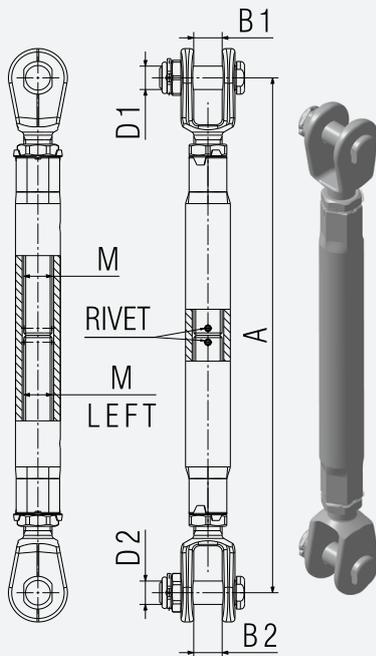


Turnbuckles clevis – clevis Zatezači vilica – vilica

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A(min.-max.)	B1	B2	C	M	D		
25.95.833	345 – 460	20	20	20	16	16	120	2,80
25.95.866	440 – 670	24	24	24	20	20	160	4,00
25.99.544.8	420 – 615	24	24	24	20	20	160	3,90
25.99.544D	650 – 840	28	28	24	27	27	210	6,10
25.99.544C	565 – 800	31	24	24	24	20	240	5,75

Material: steel tube, drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelična cijev, kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

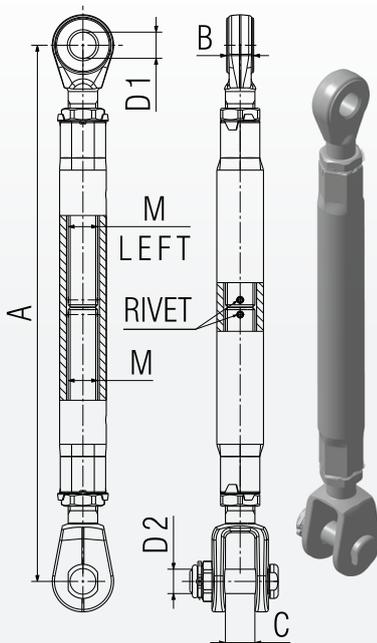


Turnbuckles tongue – clevis Zatezači očka – vilica

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A(min.-max.)	B	C	M	D1	D2		
25.97.744C	320 – 440	16	18	20	20	18	120	2,30
25.99.766.8	440 – 670	22	24	24	21,5	20	160	3,70
25.99.766B	570 – 730	22	24	24	21,5	20	210	4,25
25.99.744.7	435 – 635	19	20	24	24	22	240	4,10
25.90.777.4D	420 – 580	22	28	27	29	27	300	5,15
25.90.777	420 – 580	22	24	27	24	22	320	4,80

Material: steel tube, drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelična cijev, kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

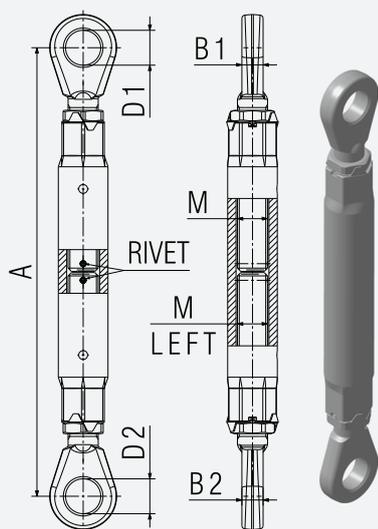


Turnbuckles tongue – tongue Zatezači očka – očka

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A(min.-max.)	B1	B2	M	D1	D2		
25.99.96A	390 – 560	19	22	20	21,5	21,5	120	2,75
25.99.966.9	480 – 700	22	22	24	21,5	21,5	160	4,00
25.99.849	900 – 1500	19	19	24	21,5	21,5	210	7,10
25.99.899.2	380 – 530	19	19	24	24	24	240	3,25
25.99.899D	405 – 575	19	19	27	31,5	31,5	300	4,20
25.90.777A	390 – 550	22	22	27	24	24	320	4,00

Material: steel tube, drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelična cijev, kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

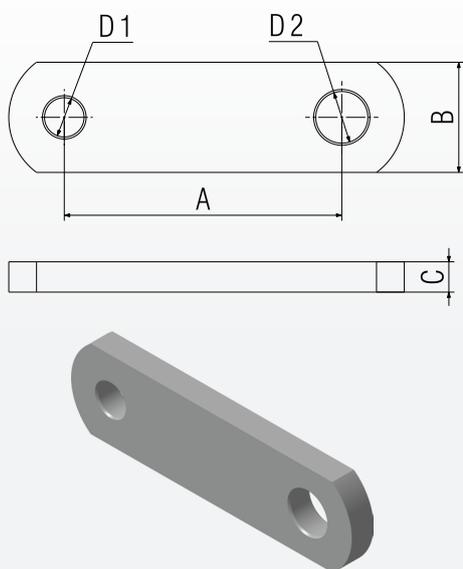


Extension links Produžnici

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D	D1		
26.62.10	150	50	18	20,5	17,5	120	1,35
26.63.10	150	50	20	21,5	21,5	160	1,55
26.67.10	150	50	22	23,5	23,5	210	1,65
26.67.86	150	80	25	29	29	300	3,40
26.60.20	150	100	25	35	35	600	4,75
26.84.15	150	100	40	42	42	840	7,40

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

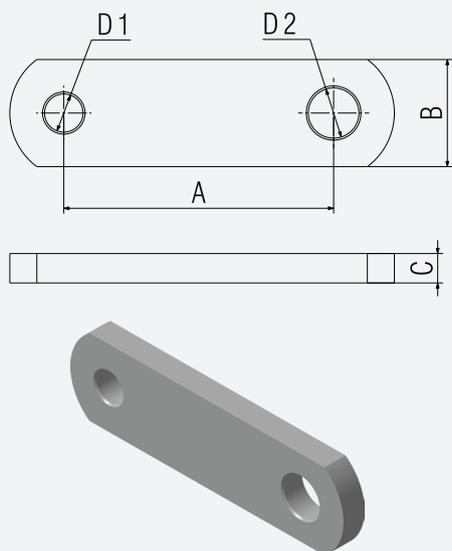


Extension links Produžnici

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>					Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	B	C	D	D1		
26.65.20	200	50	22	17,5	17,5	120	2,20
26.66.20	200	50	22	21,5	21,5	160	2,10
26.67.20.60	200	60	22	23,5	23,5	320	2,50
26.67.20.4B	200	80	22	28,5	37,5	360	3,55

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

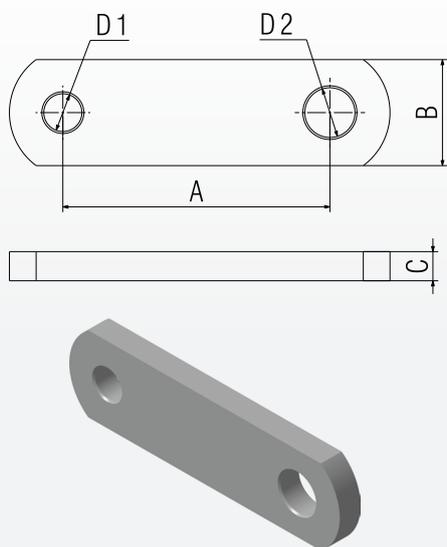


Extension links Produžnici

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>					Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	B	C	D	D1		
26.66.30.3A	300	50	18	17,5	17,5	120	2,40
26.66.30.20	300	50	22	21,5	21,5	160	2,95
26.67.30.40	300	60	18	24	24	300	2,95
26.42.80.20	300	75	25	32	29	420	5,75
26.84.15.6	300	110	40	42	42	840	12,90
26.120.30D	300	140	40	58	55	1200	18,15

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

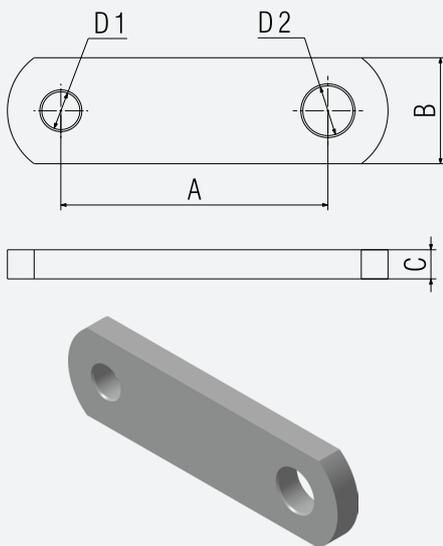


Extension links Produžnici

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D	D1		
26.42.40.20	400	50	8	21,5	21,5	60	1,40
26.66.40.4	400	50	18	21,5	21,5	120	3,10
26.67.40	400	50	22	23,5	23,5	160	3,70
26.67.40.60	400	60	22	23,5	23,5	320	4,65
26.120.40	400	120	50	55	55	1200	22,40
26.176.40	400	150	50	55	55	1760	30,45

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

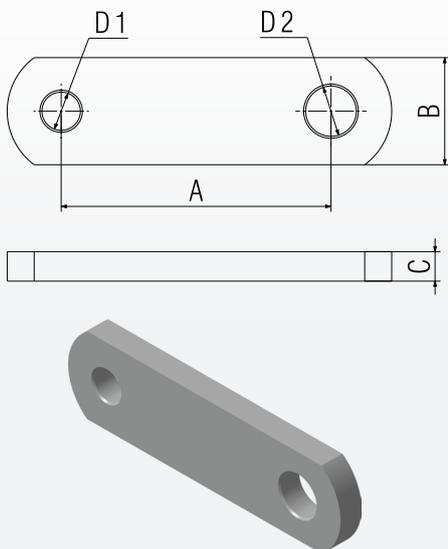


Extension links Produžnici

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D	D1		
26.65.50	500	50	22	17,5	17,5	120	4,75
26.16.50	500	50	22	21,5	21,5	160	4,70
26.67.50	500	60	22	23,5	23,5	300	5,80
26.66.60.30	600	50	20	17,5	17,5	120	5,10
26.65.60	600	50	22	17,5	17,5	160	5,50
26.67.60.60	600	60	22	23,5	23,5	320	6,75

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

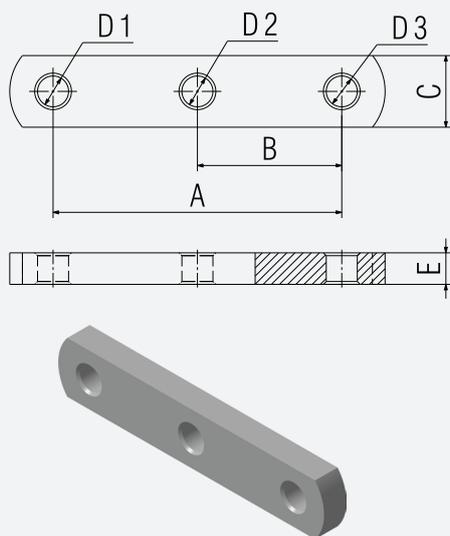


Extension links Produžnici

Catalogue number Kataloški broj	Dimension Dimenzije [mm]							Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D	D1	D2	E		
26.66.20E	200	100	50	17,5	17,5	17,5	18	120	1,65
26.66.20A	200	100	50	21,5	21,5	21,5	22	160	2,10
26.21.30.4	300	150	75	22	22	22	25	210	5,05
26.60.40	405	150	90	38	35	35	25	600	9,20
26.84.40	450	170	100	38	42	42	40	840	16,10
26.120.50	500	200	120	42	42	55	50	1200	26,70

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

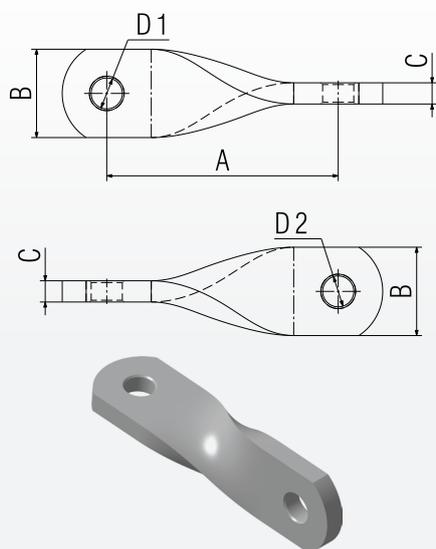


Extension links Zaokrenuti produžnici

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D	D1		
26.71.10	80	35	12	15,5	15,5	90	0,40
26.71.70	100	35	16	17,5	15,5	120	0,60
26.71.50	177	50	18	21,5	21,5	160	1,40
26.71.80	250	60	18	24	24	300	2,65
26.71.60.20	200	90	18	30	30	420	3,80

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

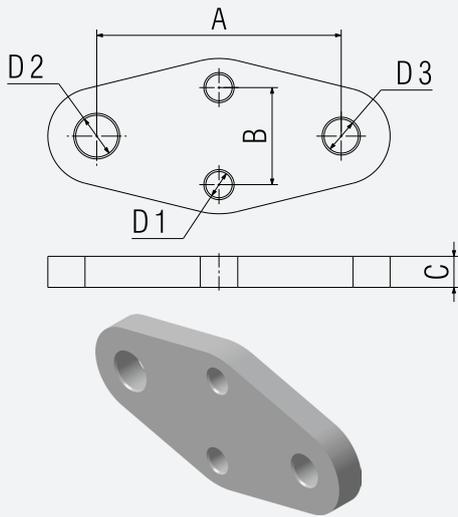


Extension links Produžnici

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D	D1	D2		
26.90.59F	125	50	16	13,5	21,5	17,5	120	1,22
26.90.10.30	100	50	18	13,5	21,5	21,5	160	1,10
26.90.10.2E	100	50	18	13,5	23,5	23,5	180	1,10
26.90.50.5	100	50	22	13,5	26,5	26,5	210	1,45
26.90.50.8	125	50	22	13,5	26,5	26,5	320	2,05
26.90.50.8G	125	50	22	13,5	28,5	28,5	400	2,10

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

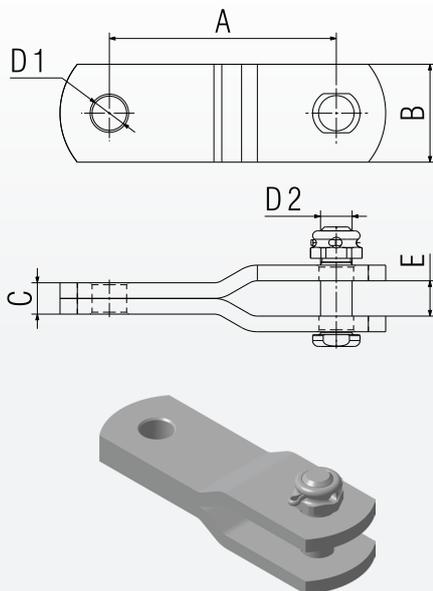


Extension links Produžnici

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D	D1	E		
26.116.10N	100	40	16	17,5	16	20	120	0,84
26.116.50C	125	60	18	23,5	20	20	160	1,65
26.21.125	125	60	24	32	24	30	210	2,40
26.118.10B	150	70	24	26,5	25	26	360	3,10
26.42.30.6	150	90	24	29	27	30	420	4,20

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

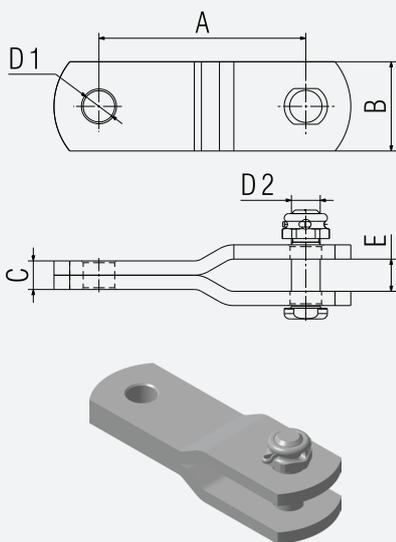


Extension links Produžnici

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>						Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	B	C	D	D1	E		
26.116.10E	200	40	16	17,5	16	20	120	1,36
26.16.40.4	225	60	20	23,5	22	24	160	2,90
26.31.10.3	250	70	20	26,5	25	24	210	3,80
26.118.10E	250	70	24	26,5	25	26	360	4,30
26.42.30.9	270	90	24	29	27	30	420	6,30

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

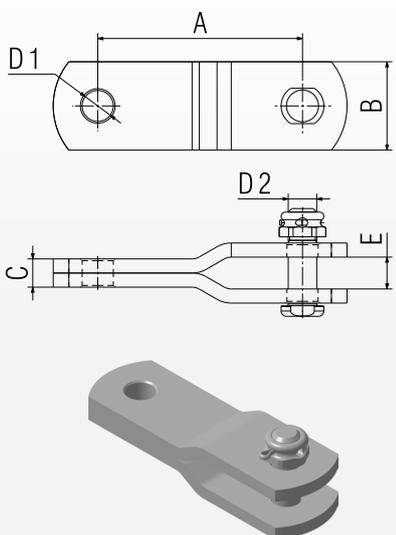


Extension links Produžnici

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>						Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	B	C	D	D1	E		
26.116.10J	400	40	16	17,5	16	20	120	2,40
26.16.40.9A	400	60	20	23,5	22	24	160	4,60
26.114.40J	400	60	16	20	19	20	210	3,65
26.118.10M	450	70	24	26,5	25	26	360	6,30
26.42.30.450	450	90	24	29	27	30	420	9,40

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

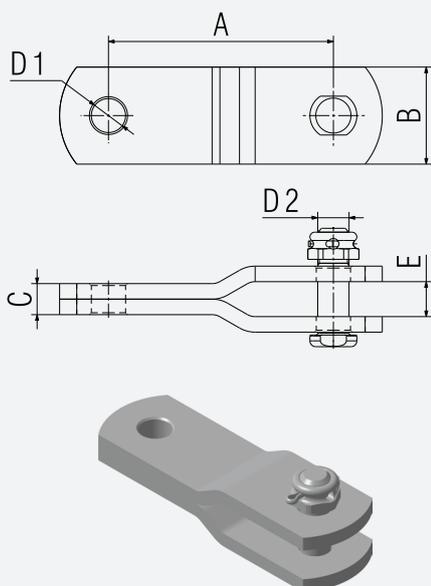


Extension links Produžnici

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>						Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	B	C	D	D1	D2		
26.116.10K	500	40	16	17,5	16	20	120	2,92
26.16.40.9B	500	60	20	23,5	22	24	160	5,60
26.114.40K	500	60	16	20	19	20	210	4,45
26.36.20.5A	500	70	20	26,5	25	26	360	6,55

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

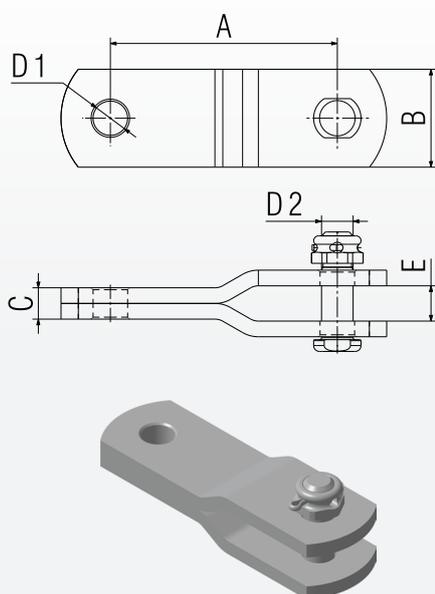


Extension links Produžnici

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>						Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	B	C	D	D1	E		
26.116.10L	600	40	16	17,5	16	20	120	3,43
26.16.40.9C	600	60	20	23,5	22	24	160	6,55
26.114.40L	600	60	16	20	19	20	210	5,20
26.118.10J	600	70	24	26,5	25	26	360	7,80
26.31.10.8C	600	70	20	27,5	26	24	420	8,25

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

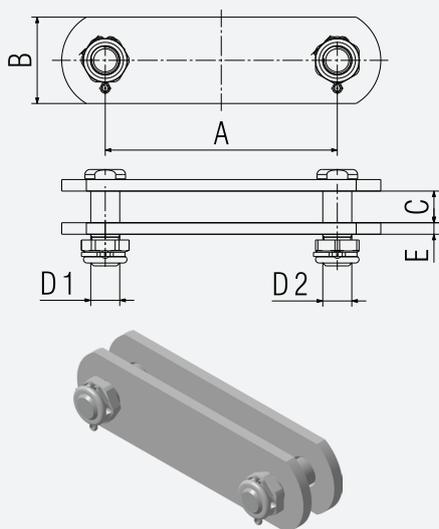


Extension links Produžnici

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>						Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	B	C	D	D1	E		
26.50.120	100	50	24	16	16	8	120	1,10
26.16.16.10	160	60	22	20	20	8	160	2,00
26.42.90.1C	140	75	28	20	24	10	210	2,95
26.42.18.3	150	90	28	42	30	12	420	6,90
26.60.20.4	200	100	28	30	42	16	600	9,60

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

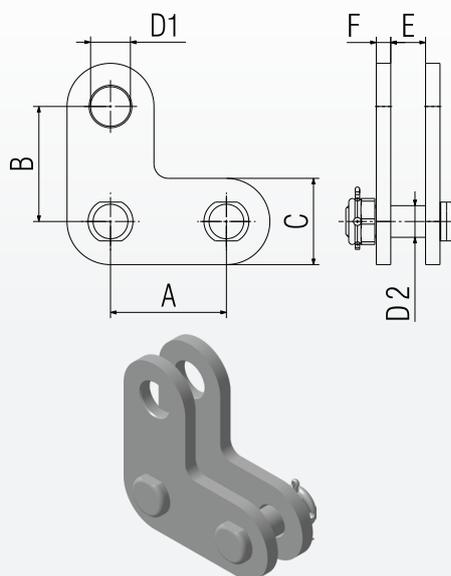


Extension links Produžnici

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>							Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	B	C	D	D1	E	F		
26.105.60	70	70	50	23,5	16	24	6	120	1,10
26.105.70	80	80	60	27,5	20	24	8	160	1,90
26.105.80	80	80	60	27,5	20	24	10	210	2,30
26.105.70.2A	80	80	60	27,5	22	24	10	300	2,20

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

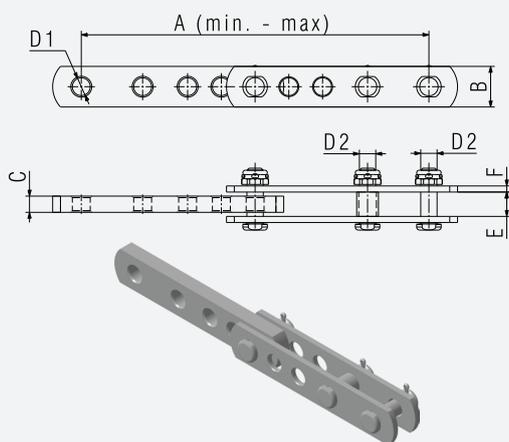


Adjustable extension links Podešavajući produžnici

Catalogue number Kataloški broj	Dimension Dimenzije [mm]							Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D	D1	E	F		
43.26.23.90.4	230 - 335	40	16	17,5	16	20	6	120	1,90
43.26.22	280 - 415	50	22	21,5	20	24	8	160	4,10
43.26.49D	380 - 570	50	22	21,5	20	24	10	210	5,50
43.26.356D	390 - 585	70	24	26	24	26	12	400	9,20

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

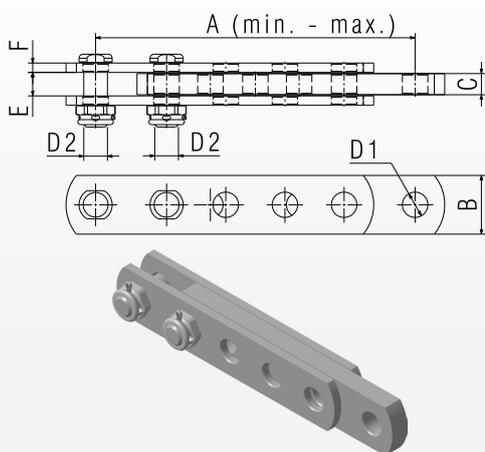


Adjustable extension links Podešavajući produžnici

Catalogue number Kataloški broj	Dimension Dimenzije [mm]							Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D	D1	E	F		
43.26.31.70	265 - 405	40	20	17,5	16	20	8	120	3,20
43.26.416.2	270 - 420	50	19	21,5	20	20	10	210	3,45
43.26.320	315 - 515	50	24	23,5	22	26	12	320	6,65
43.26.29E	400 - 700	80	24	30	28	26	12	440	12,55
43.26.356.6M	430 - 650	90	30	32	30	34	16	600	17,30

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

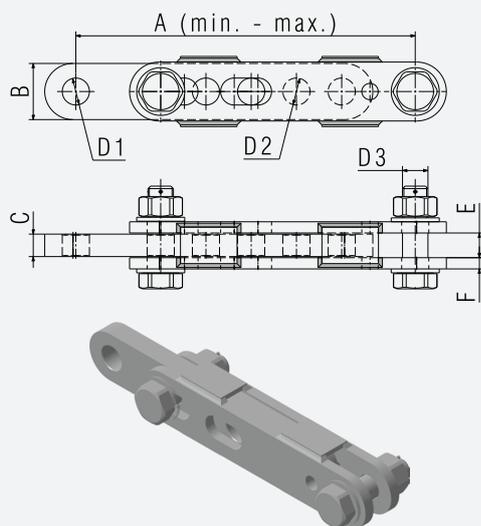


Adjustable extension links Podešavajući produžnici

Catalogue number Kataloški broj	Dimension Dimenzije [mm]								Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D	D1	D2	E	F		
26.45.20.30	562 – 842	90	25	32	35	27	28	12	450	19,65
26.45.20.30A	462 – 842	90	30	35	35	30	34	16	600	25,00
26.45.20.30B	600 – 920	100	40	48	48	45	44	20	840	40,30
26.45.20.30C	680 – 1070	120	40	48	48	45	44	20	1200	55,40

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

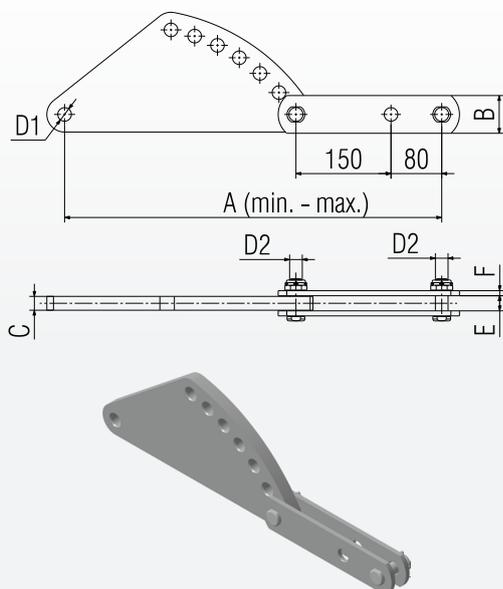


Sag adjusters Podešavajući produžnici

Catalogue number Kataloški broj	Dimension Dimenzije [mm]							Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D	D1	E	F		
43.26.143.20	295 – 595	50	19	21,5	16	20	8	120	9,85
43.26.91.30D	295 – 595	60	22	21,5	20	24	8	160	11,30
43.26.91.30C	295 – 595	60	20	23,5	22	24	10	240	10,50
43.26.91.30	295 – 595	60	22	25,5	24	24	10	320	10,75

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

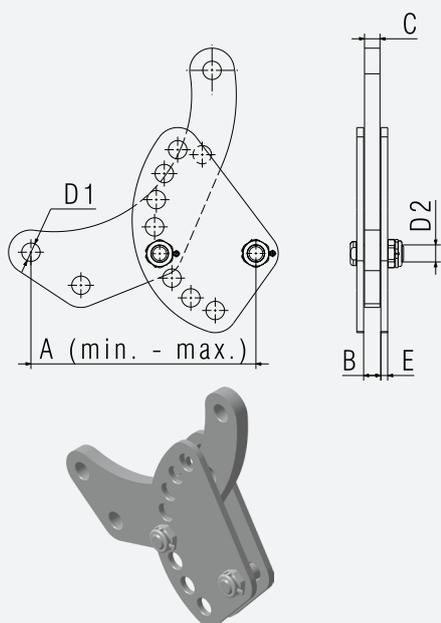


Sag adjusters Podešavajući produžnici

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D	D1	E		
43.26.122.20	150 – 460	20	18	17,5	16	6	120	6,35
43.26.122.30	152 – 452	20	18	21,5	20	8	160	7,15
43.26.122.6A	150 – 460	24	22	23,5	22	10	320	9,90
43.26.122.6B	150 – 460	24	22	21,5	25	12	400	14,95

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

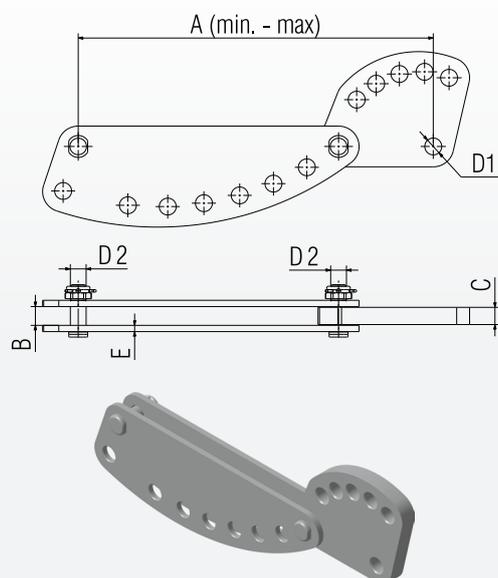


Sag adjusters Podešavajući produžnici

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D	D1	E		
43.26.122.80	150 – 450	20	18	21,5	20	6	120	8,80
43.26.123.80	150 – 450	20	18	21,5	20	8	160	10,90
43.26.124.80	150 – 450	20	18	21,5	20	8	210	11,10
43.26.151.3A	265 – 435	24	22	23,5	22	12	300	21,00

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

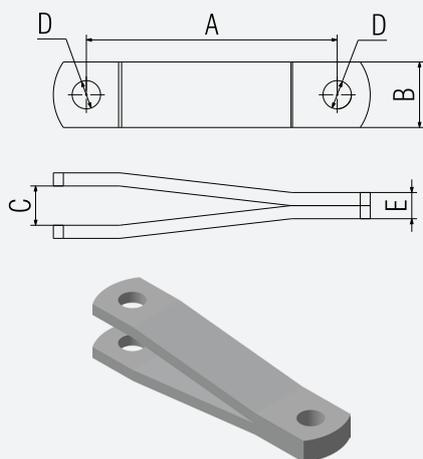


Extension links Produžnici

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>					Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	B	C	D	E		
43.26.324	190	50	30	21,5	20	120	1,90
43.26.324.2A	190	50	30	21,5	16	160	1,50
43.26.324.30	190	50	30	21,5	20	210	1,95

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

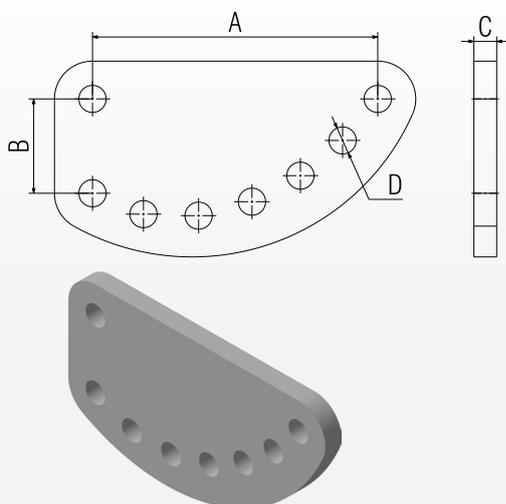


Extension links Produžnici

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>				Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	B	C	D		
43.26.164.12	225	75	18	21,5	160	4,95
43.26.90.8	130	70	16	21,5	180	4,80
43.26.149P	225	60	22	21,5	210	7,00
43.26.90.8A	130	70	20	26,5	320	6,00

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.


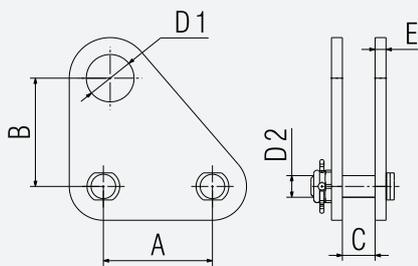


Extension links Produžnici

Catalogue number Kataloški broj	Dimension Dimenzije [mm]						Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D	D1	E		
43.26.452A	80	80	24	35	16	8	120	1,80
43.26.452B	80	80	24	35	20	10	160	2,55
43.26.452E	80	80	24	35	20	10	210	2,65
43.26.452	80	80	20	35	22	10	280	2,70

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

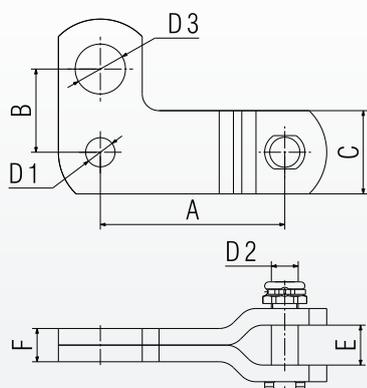


Extension links Produžnici

Catalogue number Kataloški broj	Dimension Dimenzije [mm]								Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D	D1	D2	E	F		
26.105.20C	110	50	50	17,5	16	30	24	16	120	1,40
26.105.20	110	50	50	21,5	20	30	24	20	160	1,75
26.105.20A	110	50	50	21,5	20	30	24	20	210	1,75
26.105.30	150	100	60	23,5	22	30	24	20	320	3,00

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

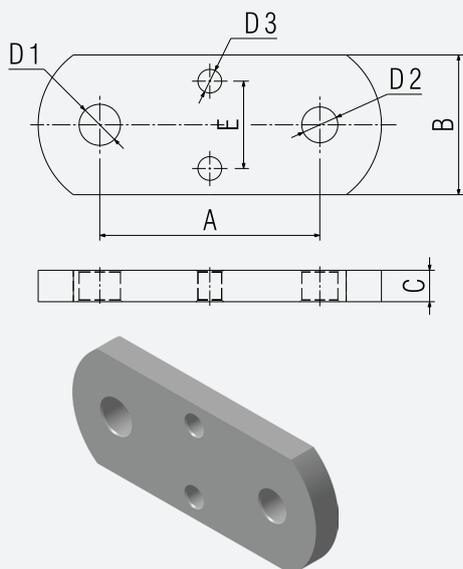


Extension links Produžnici

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>							Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	B	C	D	D1	D2	E		
26.90.60.20	120	60	16	17,5	21,5	13,5	32	120	1,10
26.67.10.9B	125	80	18	23,5	20,5	13,5	50	230	2,00
26.67.10.9C	125	80	18	23,5	23,5	13,5	50	320	2,00

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

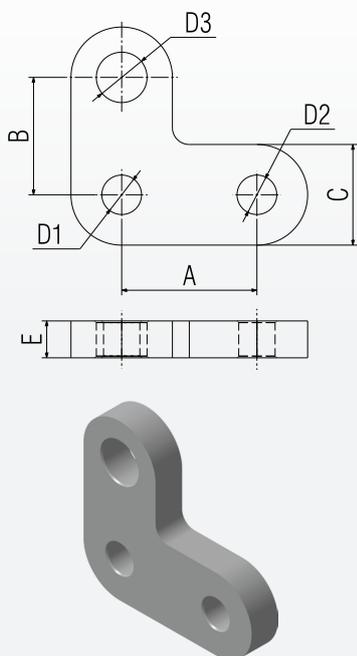


Extension links Produžnici

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>							Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	B	C	D	D1	D2	E		
43.26.374.30	70	70	60	22	22	30	15	120	1,20
43.26.374C	80	70	60	21,5	21,5	30	22	210	1,85
43.26.374V	100	80	70	23,5	23,5	30	22	320	2,70
43.26.374F	100	80	70	28,5	28,5	30	22	420	2,70
43.26.374.9A	150	100	90	34	34	30	25	600	5,20

Material: steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

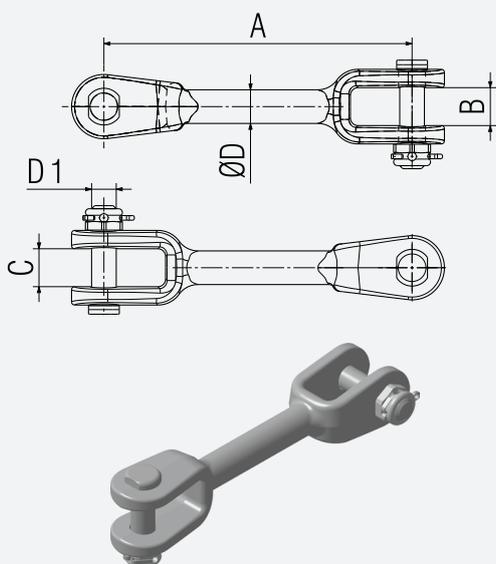


Extension links Produžnici

Catalogue number Kataloški broj	Dimension Dimenzije [mm]					Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D	E		
26.08.10	200	24	24	20	22	120	1,60
26.08.20.20	200	24	24	20	22	160	1,60
26.18.300.20	300	24	24	20	30	240	3,40
26.18.900	900	24	24	22	30	320	6,85

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

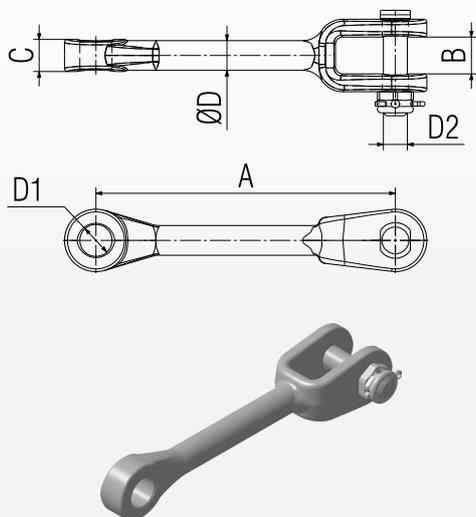


Extension links Produžnici

Catalogue number Kataloški broj	Dimension Dimenzije [mm]							Breaking strength Prekidna sila [kN]	Mass Masa [kg]
	A	B	C	D	D1	E			
26.26.30	200	24	22	17,5	16	20	120	0,95	
26.41.30	300	24	22	21,5	20	25	160	1,95	
26.52.30B	300	24	22	21,5	20	25	210	1,95	
26.42.35	350	24	22	23,5	22	30	320	3,10	

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.

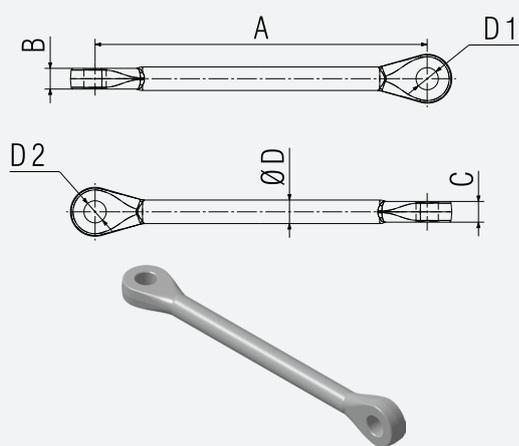

Extension links Produžnici

Catalogue number <i>Kataloški broj</i>	Dimension <i>Dimenzije [mm]</i>						Breaking strength <i>Prekidna sila [kN]</i>	Mass <i>Masa [kg]</i>
	A	B	C	D	D1	E		
26.66.90A	270	19	19	21,5	21,5	20	120	1,10
26.98.10	160	22	22	21,5	21,5	25	160	1,15
26.66.50.30D	350	22	22	23,5	23,5	25	210	1,80
26.96.20	2000	22	22	23,5	23,5	30	320	11,95

Material: drop forged steel, hot dip galvanized.
Other dimensions are available upon request.

Materijal: kovani čelik, vruće pocinčan.
Ostale dimenzije dostupne su na zahtjev.